

Complete house plans / full roof access

A3 COORDINATED DESIGN REVIEW SET / THREE BEDROOMS, THREE ENSUITES / R8 EXTERNAL WALLS 220 / 170 MM / R18 STORAGE / INTERNAL WALLS 150 MM INCLUDING PLASTER



FRONT



REAR

Full-stair roof option - refer to dimensioned drawings

DRAWING INDEX

- 01 Cover, index and design basis
- 02 Site, parking and main-floor area
- 03 Ground floor / 150 mm finished internal walls
- 04 First floor / roof-stair continuation
- 05 Roof plan / full-stair enclosure
- 06 Integrated front and rear elevations
- 07 Under-stair composition / headed wall opening
- 08 Developed stair profile / RCC slab depth
- 09 Conceptual structural framing
- 10 Roof setbacks and exit elevation
- 11 Original style references / context
- 12 Current exterior appearance

Print on A3 at 100% / actual size. Each drawing states its scale. Do not scale the photographs or the developed stair diagram horizontally.

This set replaces the separate compact-v4 and integrated-roof review PDFs. The current design includes full stairs to the roof and one conceptual structural framing option. Internal walls are 150 mm total including plaster. Connected wall faces are flush; 400 mm wardrobe lofts and lift-up bed bases keep bedroom footprints. The family/tailoring room opens to the stair base below its retained beam; a small side cabinet provides shared linen storage. Ivory fronts and oak accents replace solid timber blocks. Stair clearances and the 900 mm first-floor passage are retained. The R15 under-stair composition stands in the coordinated R10 wall opening - cut to +2.10 m, plastered header retained above; a full-height removal is not assumed.

FOR ARCHITECT / BUILDER REVIEW



Dimensioned vectors govern over the render. The stair is shown as a conceptual RCC waist-slab system only; its waist thickness, landing beams, supports, reinforcement and connections must be designed by a structural engineer. Measured site set-out, structural design, stair headroom, waterproofing, services and permit drawings remain to be coordinated by the project professionals.

COORDINATED DESIGN BASIS

External walls: 220 mm ground, 170 mm first. Internal walls: 150 mm finished including plaster. Ground floor: 59.30 m2 / 638.3 sq ft. First floor: 58.51 m2 / 629.8 sq ft. Roof enclosure: 9.02 m2 / 97.09 sq ft additional. Conservative total: 126.84 m2 / 1,365.3 sq ft. Roof landing +6.45 m; stair cover +9.00 m. Rear balcony entry is on the master-bedroom side wall, with two toilet vents facing the rear.

A smaller footprint. More useful yard.

SITE STUDY / 1:100 AT A3 / ROOF ENCLOSURE ADDITIONAL: 9.02 m2 / 97.1 SQ FT

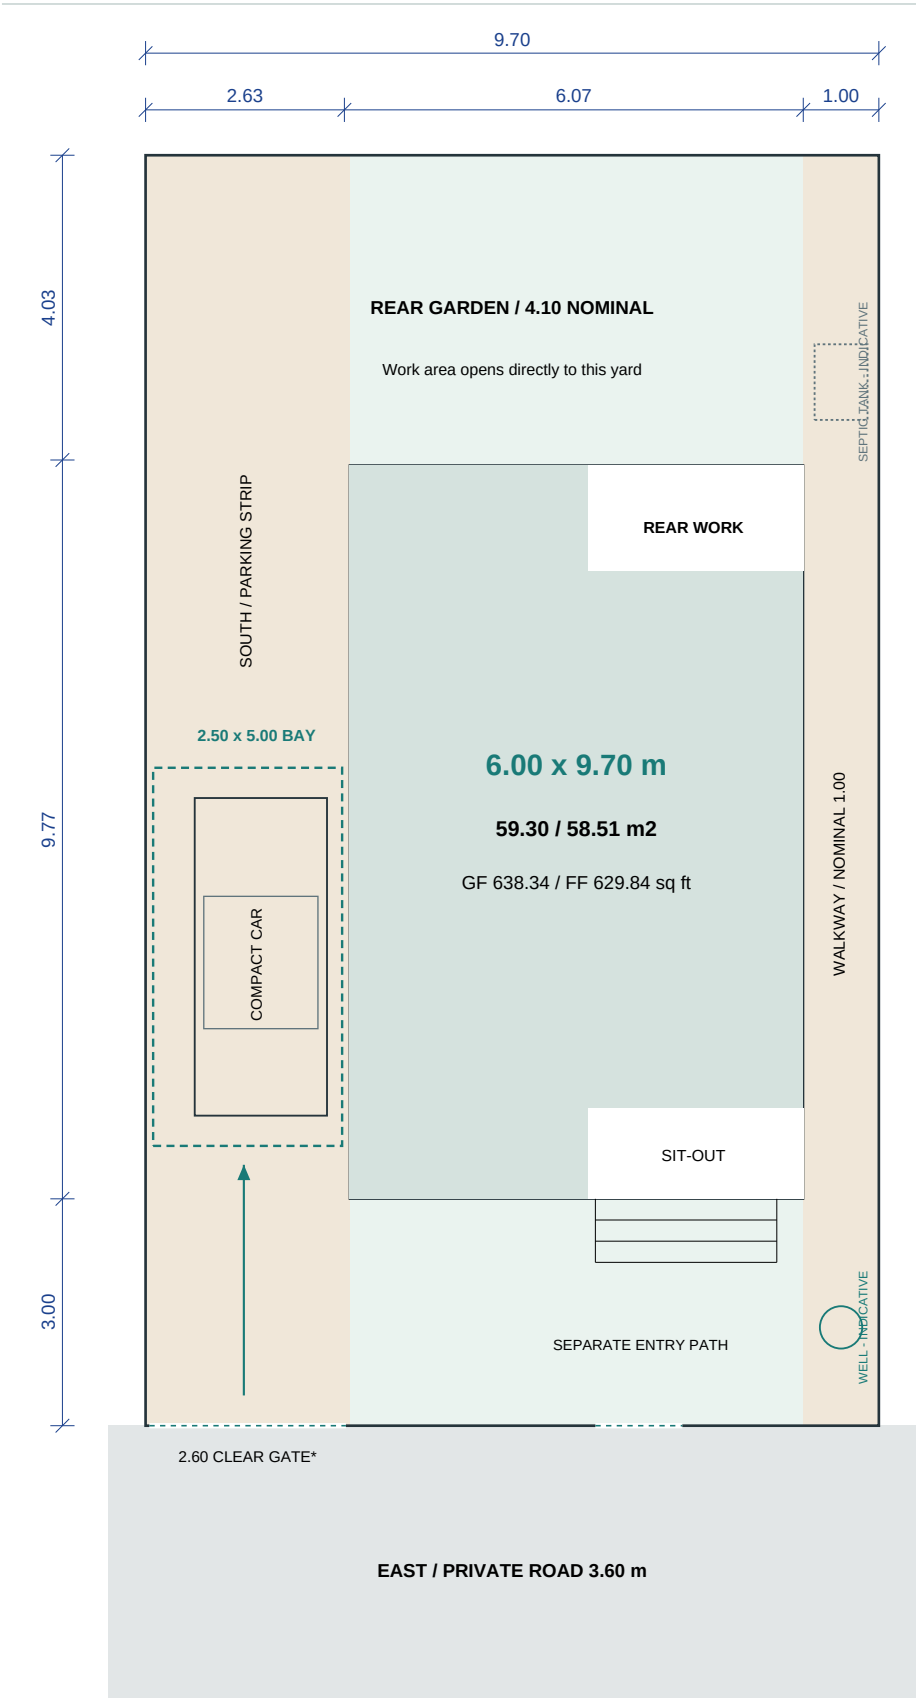

AREA LIMIT / COUNTED CONSERVATIVELY

Ground external envelope	59.30 m2 / 638.3 sq ft
First external envelope	58.51 m2 / 629.8 sq ft
Main floors only (roof additional)	117.82 m2 / 1,268.2 sq ft
Included on each floor	Walls, stairs + covered open spaces

SIDE PARKING - FITS AS A SPACE STUDY

A 2.50 x 5.00 m stall fits in the nominal 2.70 m south strip. The drawn car is 1.75 x 4.20 m without mirrors. This is for a compact car, with tight door clearance; no covered carport is added.

THE GATE IS THE UNRESOLVED PART

The 3.60 m road, boundary-wall thickness and actual vehicle turning circle control entry. The arrow shows approach only, not a verified swept path. Confirm with the real car and surveyed gate position; do not infer parking approval from this rectangle.

SOURCE PLOT IS SLIGHTLY SKEWED

The 4-cent plot sketch gives 9.70 m frontage/rear and side lengths 16.82 / 16.84 m, with 1.62 are stated area. This study uses a nominal 9.70 x 16.80 m rectangle. The separate old site plan has different geometry; a measured boundary overlay is needed before fixing yard clearances.

WALKWAY AND BUILDING EDGES



Keep the north path free of equipment and the south parking strip free of projecting fins or drains. Yard widths shown are nominal wall-to-boundary distances, not guaranteed finished clear widths. Front and rear steps sit in the yards.

INDICATIVE WELL AND SEPTIC POSITIONS

A well/borewell is marked in the northeast corner and a septic tank in the northwest corner, about 12.5 m apart along the plot depth. KPBR 2019 Rule 75 requires at least 7.5 m between any well and a septic tank or soak pit, plus 1.2 m from boundaries; this does not clear reliably across the 9.7 m width, only along the 16.8 m depth. Confirm exact points, and check for any neighbouring well within 7.5 m, with the panchayat engineer.

Ground floor / fitted bedroom storage, open living connection

R18 / 08 OCT 2026 / PLAN 1:55 AT A3 / INTERNAL WALLS 150 MM INCLUDING PLASTER / STAIR AND BASIN BOUNDARIES RETAINED

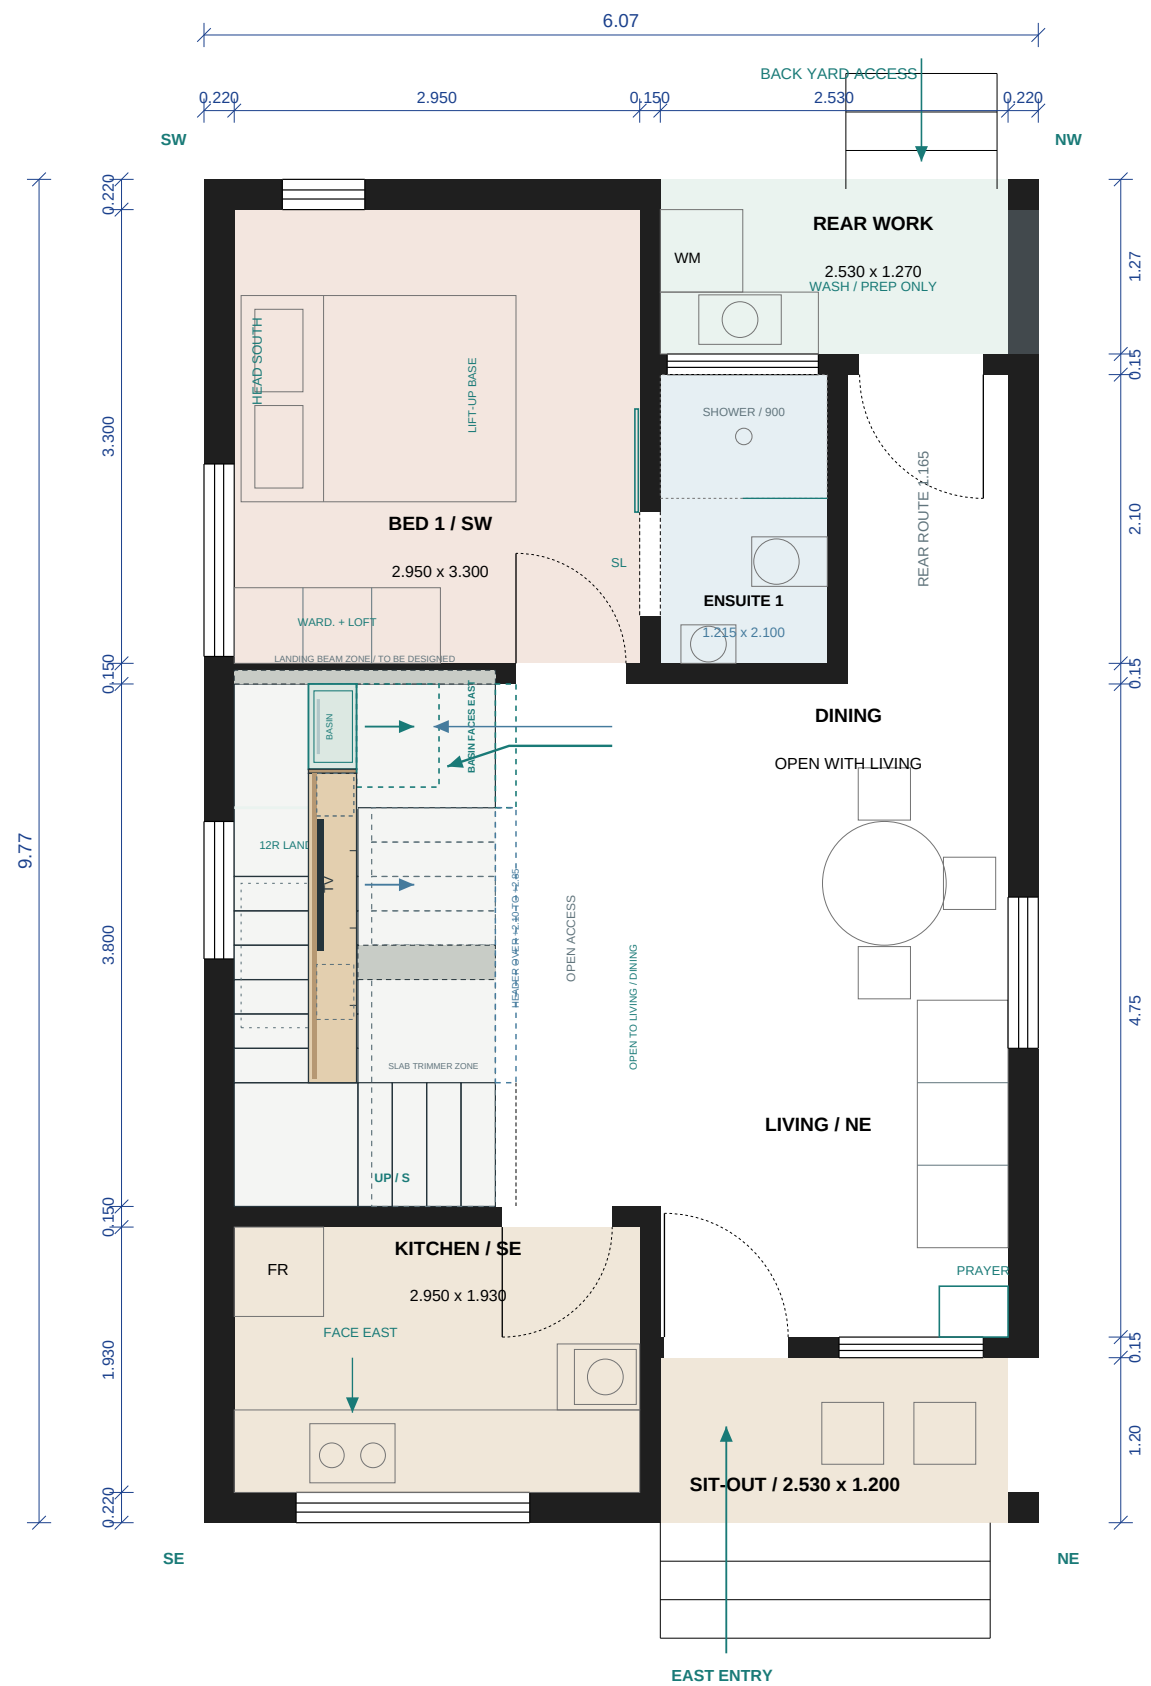

R18 / FITTED STORAGE, FLUSH 150 MM WALLS

The 1500 x 550 mm wardrobe gains a 400 mm loft: main doors to +2.10 m, loft to +2.50 m, with the space above left open. Narrow paired leaves reduce door swing. Ivory fronts and sides with one muted oak bay lighten the room. The 2000 x 1500 mm bed gains a closed lift-up storage base. Furniture footprints and all R17 aligned 150 mm finished walls are retained.

ROOM CLEARANCES / COMPACT, COORDINATED FITTINGS

Both southwest bedrooms are 2.950 x 3.300 m. The double bed has 625 mm beside it on both sides and 865 mm at its foot with the sliding leaf parked (900 mm to the wall). Ensuite 1 is 1.215 x 2.100 m with a 900 mm deep shower and a maximum 550 mm installed WC projection, leaving 665 mm in front. The service route is 1.165 m clear. Rear work is 2.530 x 1.270 m; a 450 mm preparation counter leaves an 820 mm aisle. The washing machine opens toward the clear end of this space. These are compact clearances; coordinate tile finishes and the selected fixture installation.

LIVING AND DINING / OPEN CONNECTION

There is no floor-level partition to the right of OPEN ACCESS: the passage connects directly to living and dining. The dashed outline beside the stairs marks the OVERHEAD header from +2.10 to +2.85 m, not a separating wall at floor level. The stair-side opening is 2.00 m long; the separate basin archway remains 0.90 m wide.

FITTED TV AND BASIN / EXISTING LOWER-FLIGHT BAY

The 2.25 x 0.35 m cabinet stays at x = 0.69-1.04, y = 3.20-5.45. Its 30 mm oak backing follows the measured stair underside with 60 mm clearance; the 43-inch screen centre is +0.87 m. The 0.62 x 0.35 m basin continues that run to y = 6.10 on the same face plane, facing EAST through the archway. The full-height oak fin separates the bays. Rim +0.86 m, mirror 0.40 x 0.80 m and standing zone 750 x 600 mm are retained. Basin clear height remains 1.95 m, below this set's 2.20 m benchmark. Enclosed cabinet storage is about 0.265 m3. Coordinate supply and waste behind the backing.

STAIR / RETAINED TREADS AND HEADED OPENING


The R9 ground stair retains 17 risers at 176.47 mm, with 5 starter, 7 west-flight and 4 upper-flight risers plus arrival. The 12R landing and trimmer at y = 4.20 stay fixed. First-to-roof treads are unchanged. Landing support ends at x = 2.05, clear of the bedroom door; its end bearing requires design. The 150 mm finished partition is open below +2.10 m and retains a 0.75 m plastered header to the 2.85 m slab soffit. Full-height removal with no header is not assumed; separate architectural and structural verification would be required.

DIRECTIONS AND STRUCTURAL COORDINATION

The drawing compass and directional room arrangement are retained: southeast kitchen, southwest bedroom, northeast living/prayer and south stairs. This wall revision is not a complete Vastu certification. STAIR AND FRAME ARE CONCEPTUAL ONLY. Members, increased partition loads, landing supports, reinforcement and connections require structural design. The rear cross-beam line moves with the bathroom wall. Retained member sizes and grid B/pier projections need coordination; no structural member has been reduced to hide a step. Partitions are not assumed load-bearing.

First floor / wardrobe lofts and shared household storage

R18 / 08 OCT 2026 / PLAN 1:55 AT A3 / INTERNAL WALLS 150 MM INCLUDING PLASTER / PASSAGE 900 MM CLEAR



R18 / FITTED WARDROBES AND LINEN STORAGE

All wardrobes keep their footprints and gain 400 mm lofts above the 2100 mm main units. Ivory fronts, narrow paired doors and muted oak accent bays create a fitted finish. Cabinet tops at 2500 mm leave 50 mm below the indicative beam soffit; the space above is left open. Bedroom 3 has a continuous 90-degree L carcass with no solid filler. The study opens to the stairs below the retained beam. A 750 x 450 mm shared linen cabinet sits beside the tailoring benches. All beds gain lift-up storage bases.

BEDROOMS IN SW AND NORTH

R17 aligns the central wall faces through both floors. The southwest master is 2.950 x 3.300 m; Bedroom 3 is 2.580 x 3.575 m. The passage stays 900 mm clear. Both ensuites are rebalanced to 1.215 x 2.100 m, with a 900 mm deep shower zone and compact WC. Ensuite 3 uses a surface-sliding door to avoid the bed and fixtures.

NO BEDROOM IN THE SOUTHEAST

The southeast room remains a study above the kitchen. Bed heads retain their southward orientation. The master keeps 625 mm at each side of the double bed and 865 mm at its foot with the sliding leaf parked (900 mm to the wall). Bedroom 3 keeps 625 mm to its wardrobe, 600 mm behind the bed and 580 mm at the foot: compact, with a sliding ensuite door.

REAR DRYING TERRACE

The covered rear balcony remains above the work area, now 2.580 x 1.220 m clear. Its 850 mm side door is moved to y = 8.60, clear of the deeper bathroom wall. Access stays private to the master; the front balcony remains common.

TWO SEPARATE ENSUITES


Ensuite 2 serves only the master and stacks above Ensuite 1. Ensuite 3 serves only Bedroom 3 and sits above the ground service passage, not a bedroom or kitchen. The two bathrooms are separated by a full-height wall. The south stair continues to the roof. Its indicative landing support ends at x = 2.05, clear of the master door; end bearing requires structural design. See sheets 05 and 08.

WALL THICKNESS, AREA AND STRUCTURE

Gross floor envelope remains 58.51 m² / 629.84 sq ft, including stairs and covered balconies. Walls are 150 mm total including plaster. Bathroom WC projection is limited to 550 mm installed, giving 665 mm clear in front; it is a compact layout. Coordinate carrier/cistern, tiles, services and structural pier sizes without consuming the published clearances.

Roof access / one compact enclosure

ROOF PLAN 1:55 AT A3 / FULL SOUTH STAIR / FRONT AND REAR FACADES RETAINED

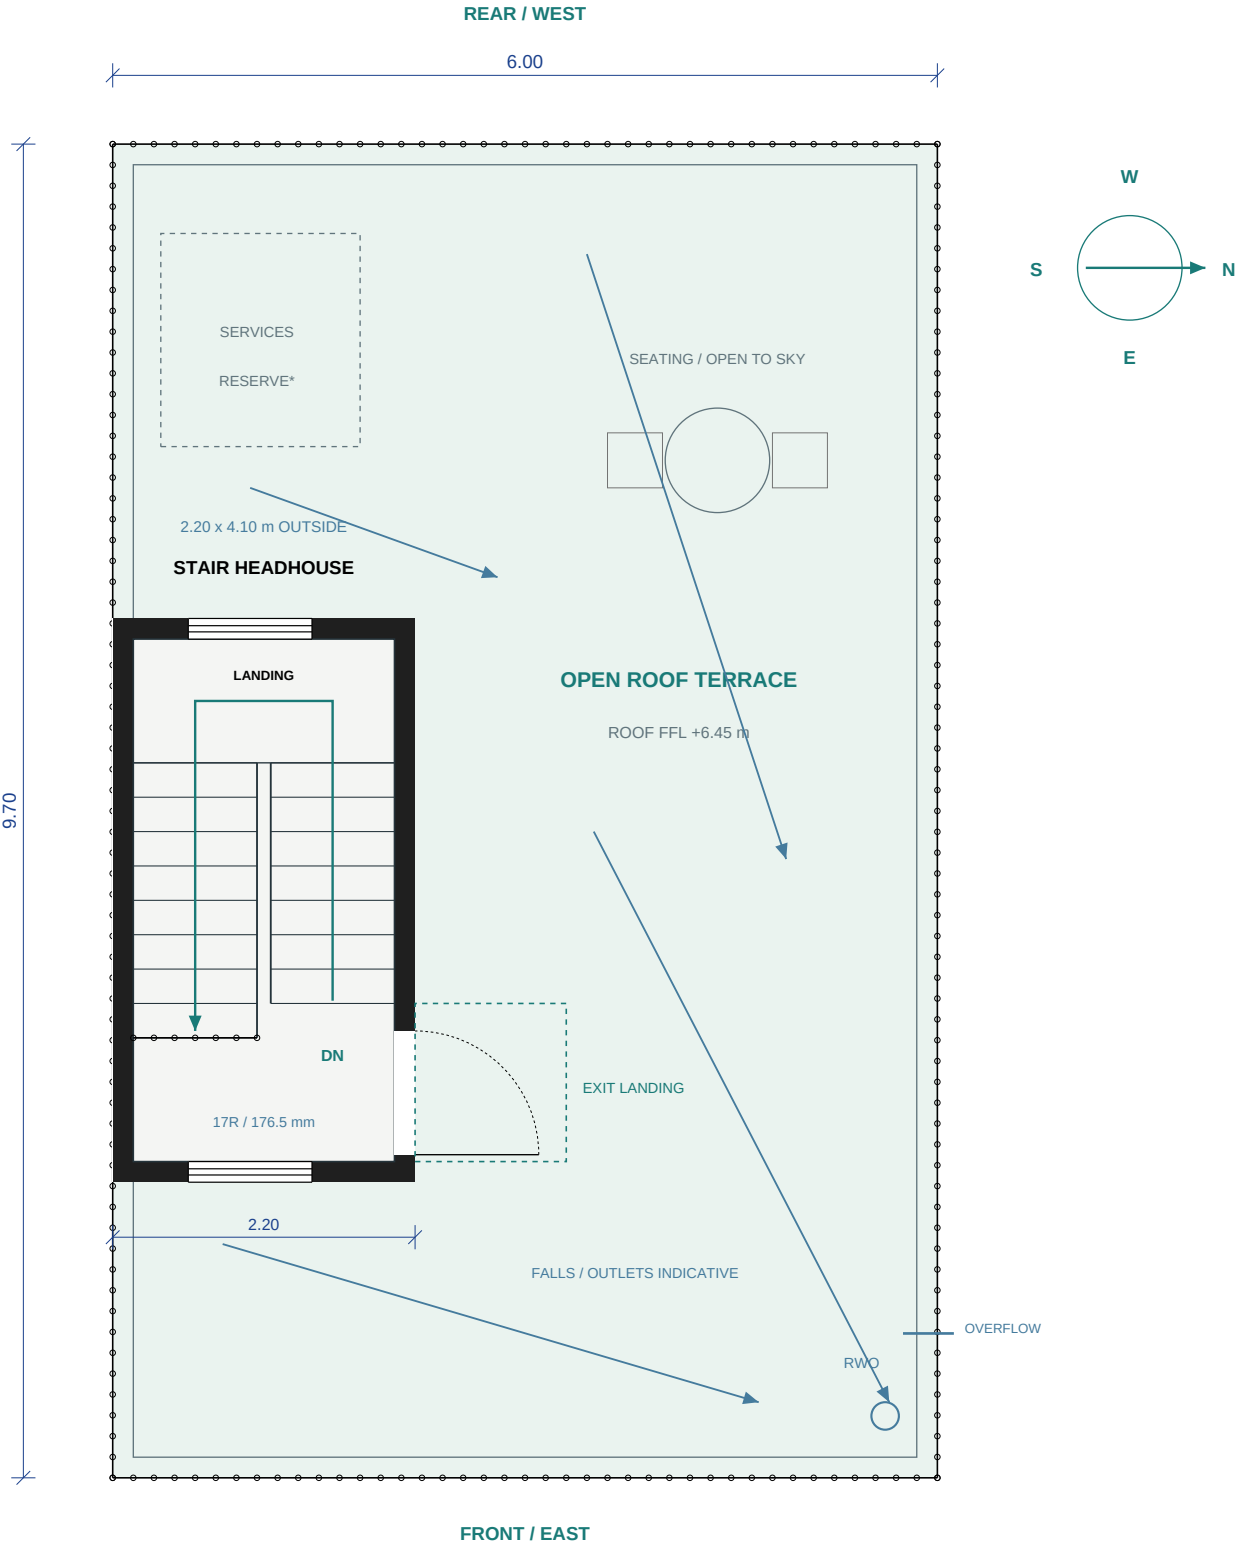

MATERIALS CONNECT THE TWO ROOF LEVELS

Use vertical timber-look cladding on the enclosure's east and west end walls to match the existing screen. Warm-white side walls and a shallow white fascia with a thin charcoal edge keep the upper enclosure visually light.

SAME STAIR, SAME FOOTPRINT

The roof enclosure remains 2.20 x 4.10 m outside, adding 9.02 m² / 97.1 sq ft. Its front face is set back 2.15 m; the rear face is set back 3.45 m. Ground remains 638.34 sq ft; first remains 629.84 sq ft. Internal alignment changes do not enlarge either footprint.

KEEP THE OPEN ROOF USABLE

The 900 mm exit door opens onto the north-side roof landing. Keep its swing and approach clear. The perimeter guard is shown continuously at 1.10 m concept height; final infill and fixings need detailed design.

THE SILHOUETTE IS TALLER

The cap is +9.00 m, 1.60 m above the existing +7.40 m timber screen. The enclosure is narrower and set back, but remains visible. This option retains the approved first-floor rear canopy and toilet-vent arrangement.

DETAILING STILL TO COORDINATE

Cladding build-up must fit the stated envelope. Coordinate weathering, cap flashings, waterproofing, guard anchors, stair structure and clear headroom. Drainage arrows and the services reserve are inherited concept indications, not installation details.

A stepped roofline in the same materials


FRONT / REAR ELEVATIONS 1:55 AT A3 / FULL PROJECTED HEIGHTS, WITHOUT PERSPECTIVE CONCEALMENT

FRONT / EAST



The narrow timber-clad enclosure rises behind the existing front-left screen. Repeat its white cap and dark edge; retain the front balcony, windows and entrance below.


REAR / WEST

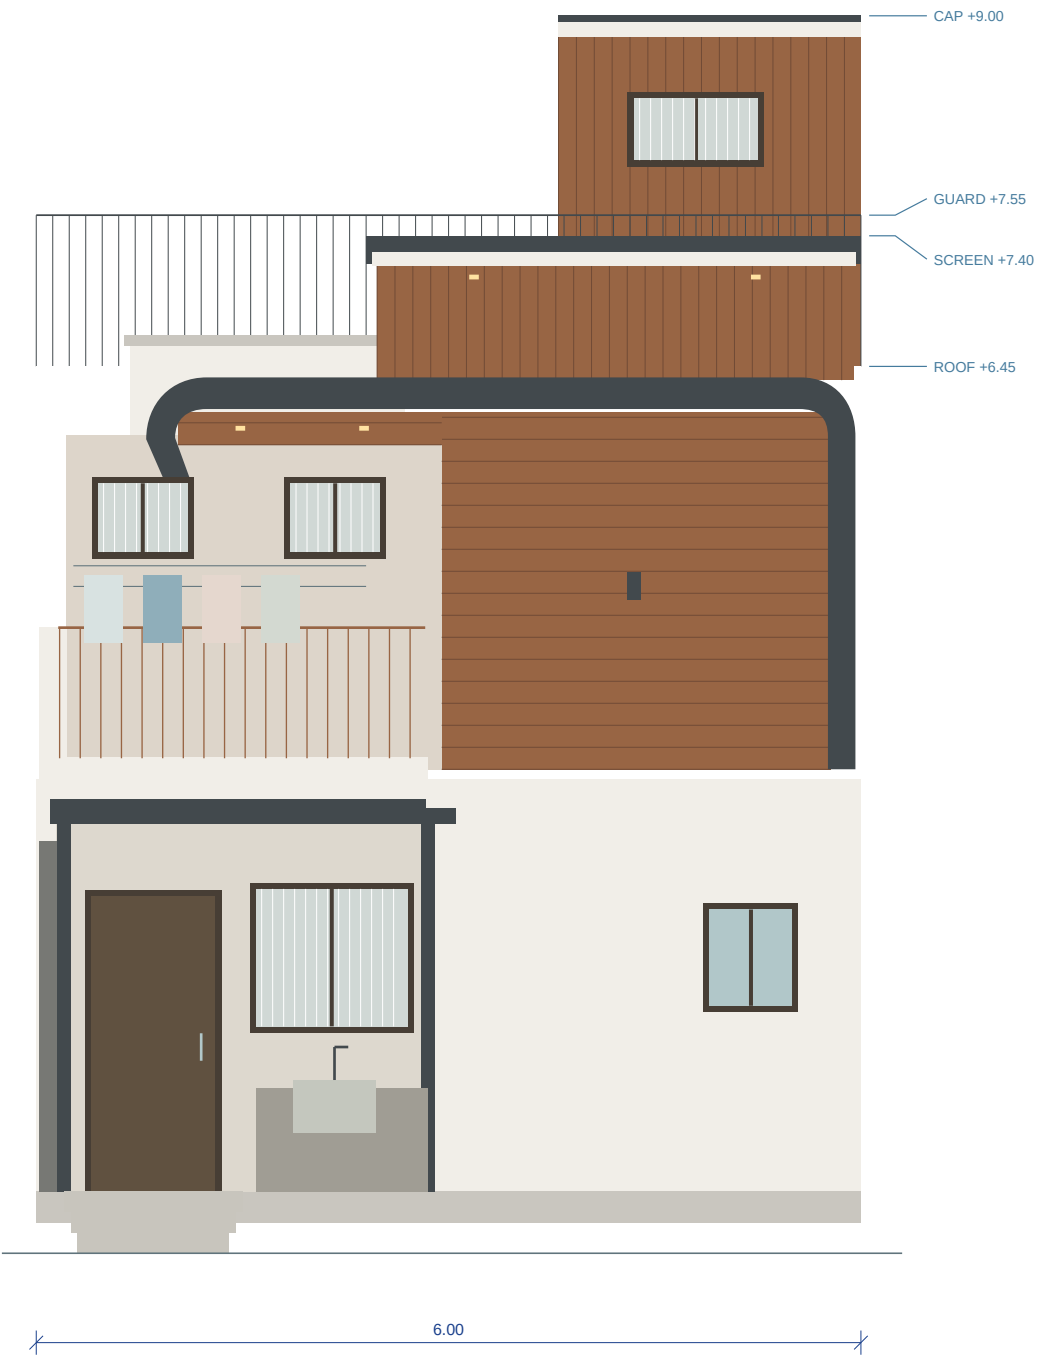

At the rear the enclosure sits behind the right timber screen. The open left drying balcony, short curved canopy return, two toilet vents and concealed master side entry remain.

Under-stair built-in / joinery and basin in the lower-flight bay

R17 / 08 OCT 2026 / STAIR PLAN 1:25 AND BAY SECTIONS 1:40 AT A3 / STRUCTURE IS CONCEPTUAL MASSING, NOT A STRUCTURAL DESIGN

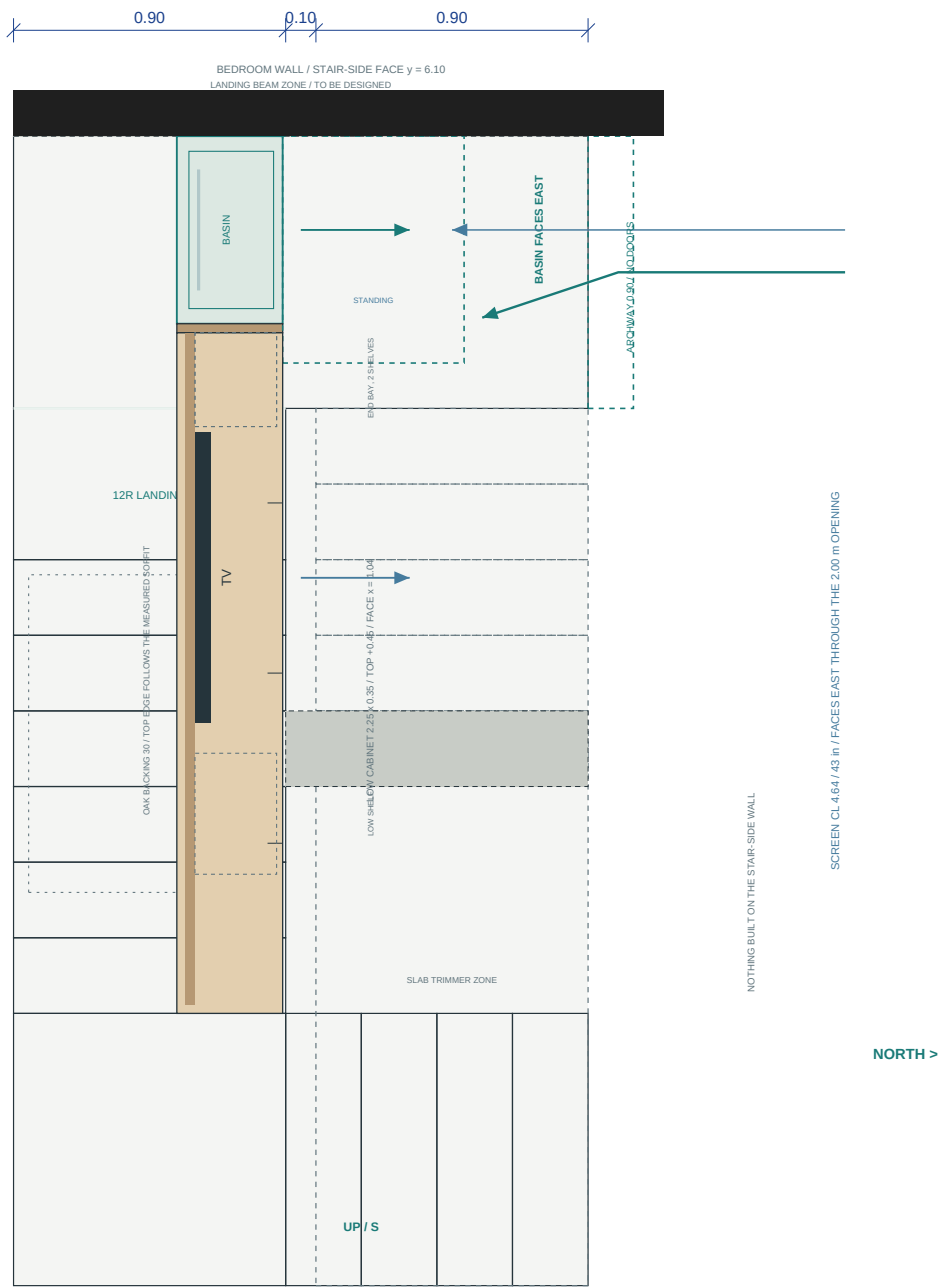

One continuous run in the bay that actually has the raking soffit

The R12 stair, all risers, flights, landings, trimmer, structural support conditions and retained +2.10 to +2.85 m header heights are unchanged. R16 grows the finished header to 150 mm toward living, keeping its stair face fixed, as well as the 0.90 m doorless archway. R14 emptied the upper-flight bay and built the joinery into the lower-flight bay, under a real 1.50 m rake. R15 now brings the basin across into that same bay, on the same depth and the same face plane, so the under-stair volume reads as one continuous 2.90 m fitted run instead of a joinery run plus a separate corner fitting. The upper-flight bay is left completely empty.

1 / RISER SHIFT, 5 + 7 + 4-PLUS-ARRIVAL

Starter grows from 2 to 5 risers inside the stair's own footprint. West flight keeps its exact R2 tread positions, renumbered 3 risers higher (6-12). The intermediate landing rises from riser 9 to riser 12 (+0.53 m). The upper flight needs only 4 risers instead of 7, so the trimmer moves from y = 3.45 to y = 4.2.

2 / R15 / BASIN CONTINUES THE RUN, 0.62 x 0.35 m, FACING EAST

The vanity leaves the bedroom wall and continues the joinery run at x = 0.69-1.04, y = 5.48-6.10: same 0.35 m depth, same face plane at x = 1.04, same EAST orientation as the screen opposite, so it is read face-on from the archway. Counter, drawer, vessel, mixer and the +0.86 m rim are unchanged; the vanity gains 0.12 m because the bay runs to the wall. The mirror moves onto the oak backing, still 0.40 x 0.80 m at z = 1.00-1.80, and a full-height fin at y = 5.45-5.48 screens the joinery from splash. Standing zone 750 x 600 mm at x = 1.04-1.64; clear height a uniform 1.95 m under the 12R landing. Supply and waste run behind the backing into the y = 6.10 wall - TO BE COORDINATED WITH THE PLUMBING DESIGN.


3 / R14 / 2.25 m LONG x 0.35 m DEEP, UNDER THE LOWER FLIGHT

R14 moved the fitted TV joinery into the volume under the LOWER / WEST FLIGHT, where the real raking soffit is. The unit is 2.25 x 0.35 m at x = 0.69-1.04, y = 3.20-5.45, facing EAST and read from the living room through the retained 2.00 m headed opening. A 30 mm oak backing at x = 0.72-0.75 follows the flight underside 60 mm clear. A 43-inch screen, 0.96 x 0.54 m, sits at centreline y = 4.64, centre +0.87 m; a low shelf and a two-shelf end bay close the run. The cabinet is capped at +0.45 m on a recessed lit plinth, face at x = 1.04 just clear of the flight edge.


4 / CONCEPTUAL RCC STAIR / EVERYTHING ELSE LOCKED

STAIR SHOWN AS CONCEPTUAL RCC WAIST-SLAB SYSTEM. FINAL WAIST-SLAB THICKNESS, LANDING BEAMS, SUPPORT CONDITIONS, REINFORCEMENT AND CONNECTIONS TO BE DESIGNED BY STRUCTURAL ENGINEER. 150 MM FINISHED PARTITION WALLS ARE NOT TO BE ASSUMED LOAD-BEARING. Support: plinth, west external wall, landing beam zone in the bedroom cross-wall and the trimmer at y = 4.2. Partition cut below +2.10 m, header retained above.

SECTION / UPPER-FLIGHT BAY / LOOKING SOUTH / 1:40 / CONCEPTUAL RCC

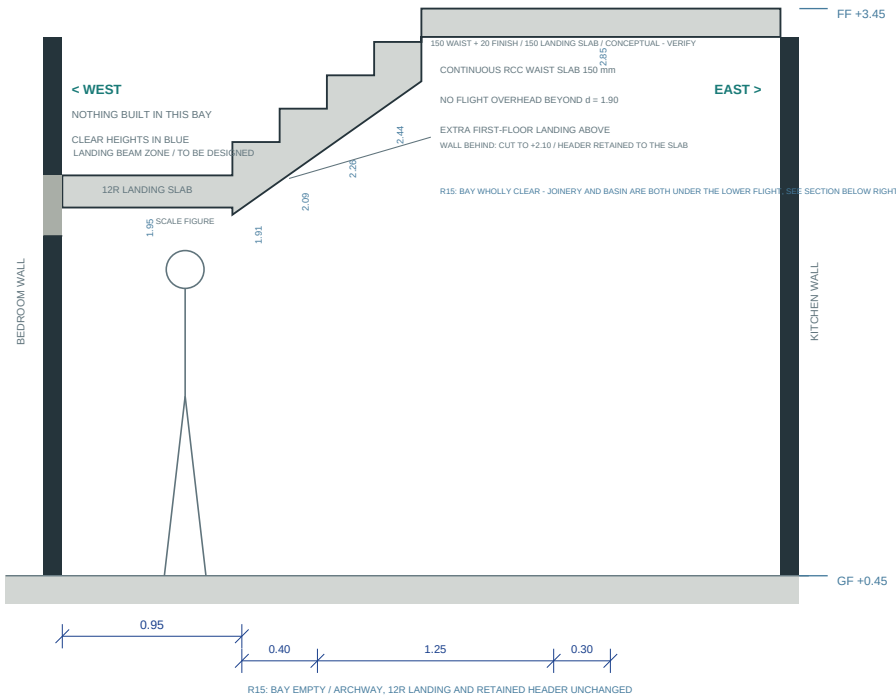


SECTION / LOWER-FLIGHT BAY / JOINERY AND BASIN / 1:40

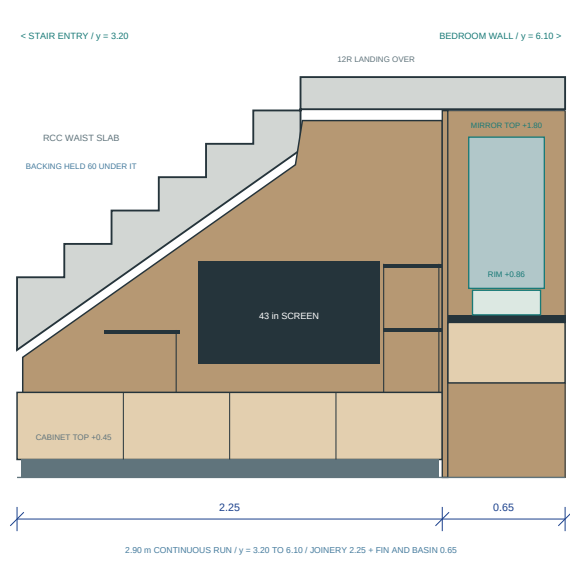

Same R2 tread positions, now risers 6-12. Backing held 60 mm clear of the real flight underside; 2.25 x 0.35 m cabinet, then the full-height fin, then the 0.62 m vanity to the wall - one face plane at x = 1.04 throughout, all facing EAST. Waist slab conceptual.

First-floor stair and roof headroom


R14 / 16 SEP 2026 / PROPOSED FIRST-FLOOR STAIR 1:35 / DEVELOPED STAIR PROFILE 1:50 AT A3 / CONCEPTUAL RCC WAIST AND LANDING SLABS

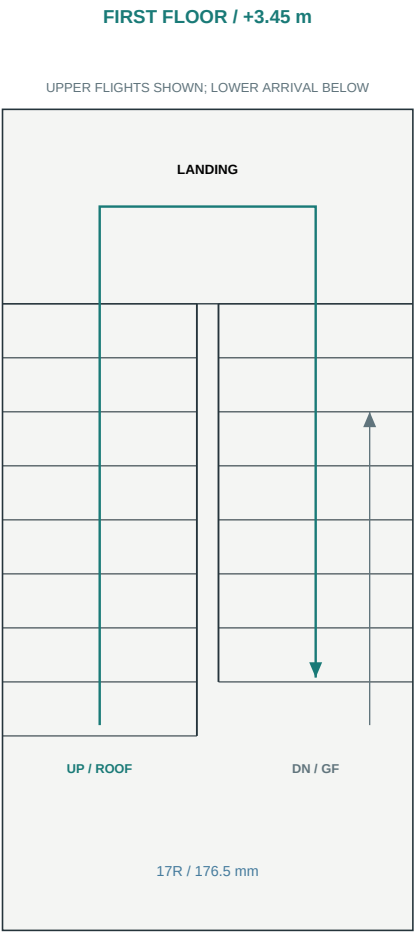

Remove the former guard across the bottom of the upward flight at first-floor level. The north return flight lands from below; the south flight begins the next rise to the roof.

Two rises of 3.00 m, each 17 risers of 176.47 mm and 250 mm treads. R9 redistributed the ground risers (5 + 7 + 4-plus-arrival); first-to-roof keeps 9 + 8. WALKING-LINE HEADROOM IS NOT UNIFORM AND BOTH GROUND FLIGHTS ARE UNDER THE 2.20 m BENCHMARK: west flight 1.73 m, upper return 2.09 m; first-to-roof 2.67 m and 2.40 m. R9 raised the west flight 0.53 m toward the parallel flight above; the 2.26 m once stated here was pre-R9. RESOLVE IN THE DESIGN.

The existing +7.40 m decorative screen is too low to be a roof-access enclosure. The new stair cover is +9.00 m, set back 2.15 m from the front and 3.45 m from the rear. Setbacks reduce visibility; they do not guarantee an unchanged roof silhouette.

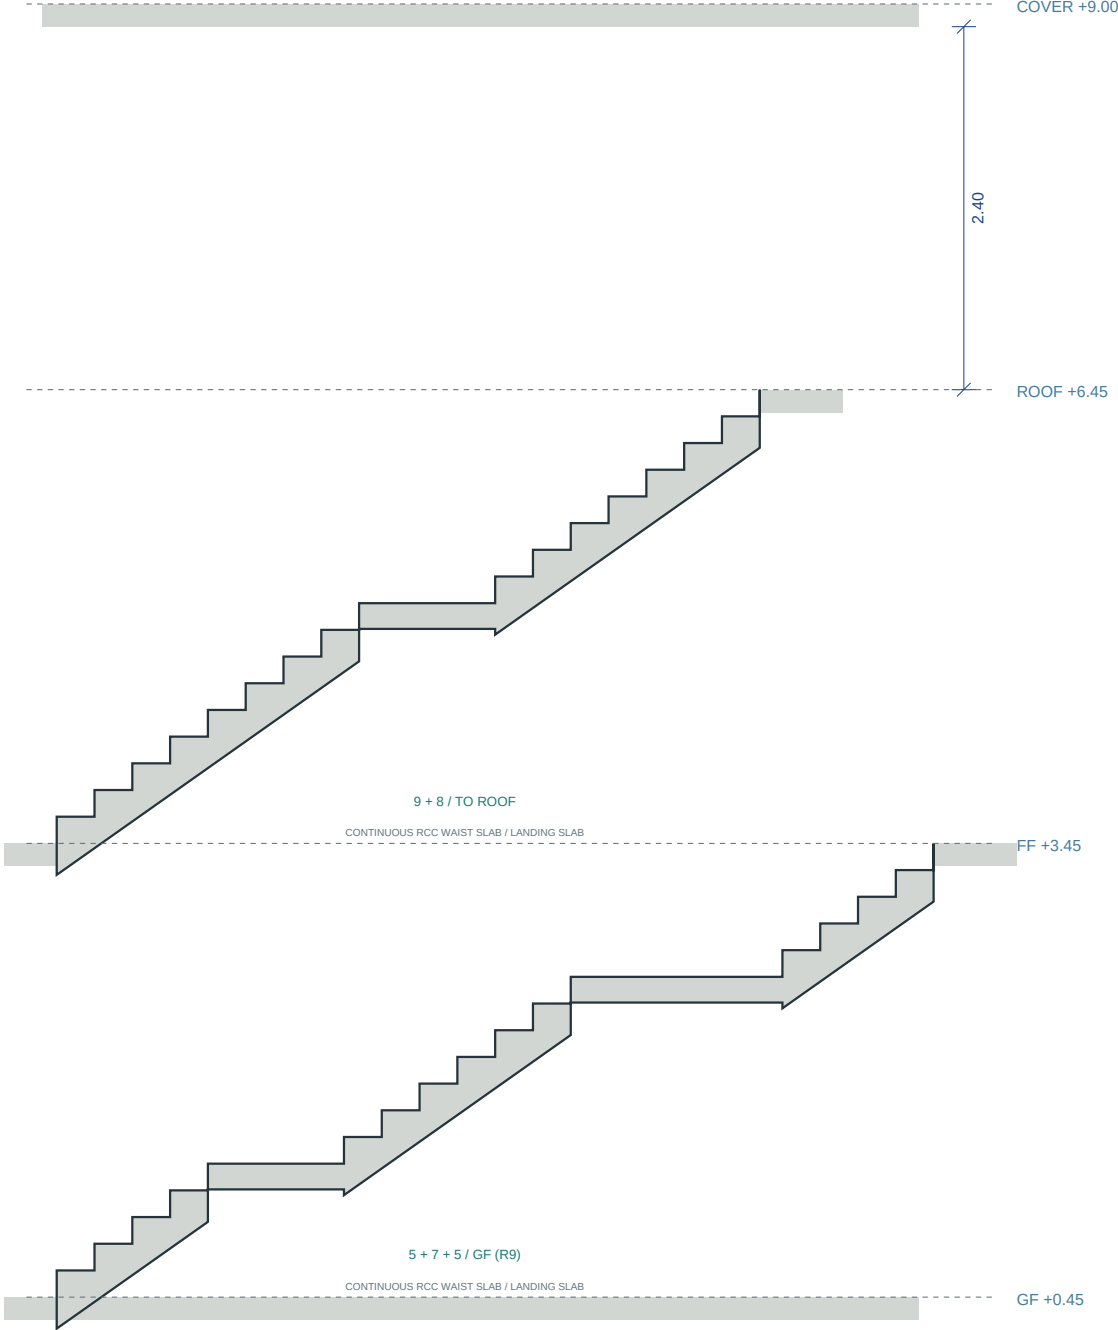


UNFOLDED PATHS / NOT HORIZONTAL SET-OUT / 150 mm WAIST + 20 mm FINISH, INDICATIVE

Developed paths: GF has a 5 + 7 + 4-plus-arrival riser turn (R9, was 2 + 7 + 8) and neither R10, R12 nor R14 touches it; first-to-roof retains 9 + 8 unchanged, so the stair continues to the roof exactly as before. Each flight shows its slab depth and soffit, landing on the plinth, the landing slabs and the floor slabs. STAIR SHOWN AS CONCEPTUAL RCC WAIST-SLAB SYSTEM. FINAL WAIST-SLAB THICKNESS, LANDING BEAMS, SUPPORT CONDITIONS, REINFORCEMENT AND CONNECTIONS TO BE DESIGNED BY STRUCTURAL ENGINEER. 150 MM FINISHED PARTITION WALLS ARE NOT TO BE ASSUMED LOAD-BEARING.

Conceptual structural framing

R17 WALL ALIGNMENT / 08 OCT 2026 / TYPICAL FRAMING PLAN 1:55 AT A3 / ONE COORDINATED OPTION, NOT A STRUCTURAL DESIGN

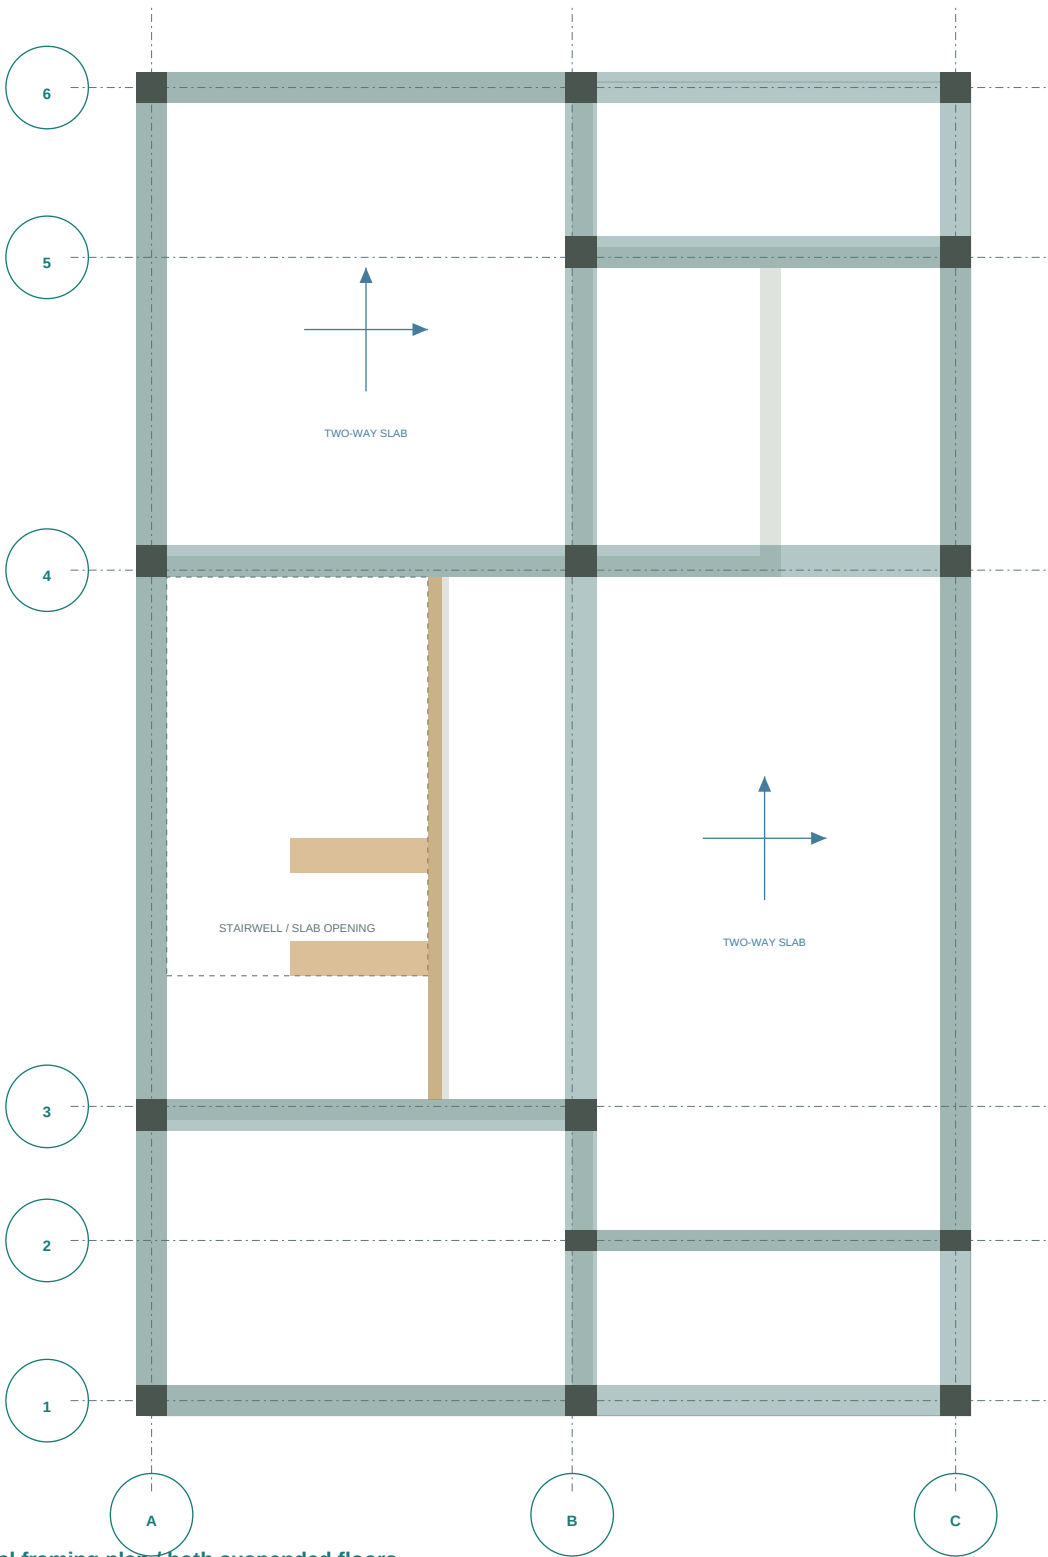

Typical framing plan / both suspended floors

Solid = column zones. Green = beam lines. Amber = stairwell trimmers. Ghosted grey = the existing walls, for location only.

THE GRID

Three longitudinal and six transverse lines, every one set out on a wall or pier that already exists. A / B / C = west external wall, central spine line with its piers, east external wall. 1 to 6 = front face, sit-out edge, kitchen/stair wall, bedroom wall, rear cross wall, rear face.

COLUMNS

15 column zones. Fourteen fall on an existing wall junction or an existing pier. Only C4 is new: it stands inside the 220 mm ground external wall beside the rear service passage, added to keep the grid C span under 5 m. No column stands free of a wall, on the stair, or in the under-stair unit.

HOW MEMBERS ARE SIZED HERE

R17 internal wall bands are 150 mm finished including plaster. The previously drawn conceptual member boxes and grid positions are retained for engineer review; 230 mm members can project beyond a partition. Grid B straddles the aligned wall band by 50 mm west / 30 mm east. Other projection sides: 3 south into the kitchen, 4 north into Bedroom 1, 5 north into the rear work area. Grids 3 and 4 matter - the other way would leave 2.20 m over the stair starter landing and clash with the R9 basin against the bedroom wall. 230 mm is indicative only.

BEAMS AND SLABS

21 beam lines; longest 4.88 m, shortest 0.97 m. Indicative floor slabs are 150 mm. Stair trimmers retain the ground arrival at y = 4.20 and the roof arrival at y = 3.45. The rear cross-beam grid follows the revised wall at y = 8.425. A3 and A4 continue to the +9.00 m stair cover. Grid 4 A4-B4 carries the 12R landing. The 150 mm finished stair-side wall retains its +2.10 to +2.85 m header; a full-height removal is not assumed. The ground floor is on grade.


COORDINATION TO RESOLVE

Column C4 is the only member not already implied by an existing wall junction or pier. It stands inside the 220 mm ground external wall beside the rear service passage and takes no room area. Foundations, plinth beams and the ground-slab build-up are not shown and are entirely for the engineer.

STATUS

CONCEPTUAL FRAMING ONLY. The revised rear grid and retained member sizes are an option for review, not a structural design. Column and beam sizes, partition loads, slab thicknesses, reinforcement, foundations and connections require engineering. Partitions are not assumed load-bearing.

HOW THE BEAM DEPTH SITS IN THE STOREY / DIAGRAMMATIC

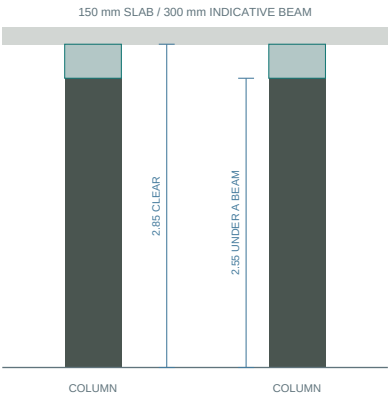


Walls are 2.85 m clear. An indicative 300 mm downstand leaves about 2.55 m under a beam line. Beam soffits, drops and any flush-beam or band-beam alternative are the engineer's to decide.

Setbacks, height and the roof exit

LONGITUDINAL MASSING PROFILE 1:50 / ENCLOSURE NORTH ELEVATION 1:35 AT A3

SOUTH-WING PROFILE / FRONT AT LEFT

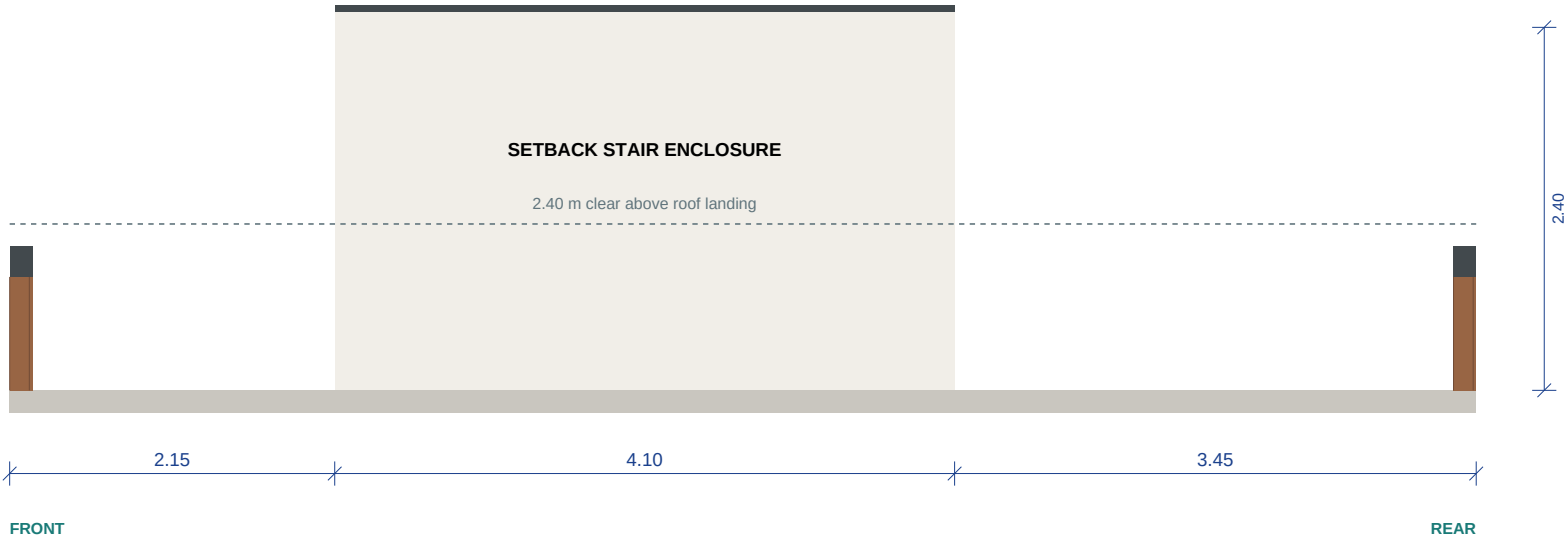

The foreground screens stay at +7.40 m. The new cap is +9.00 m; the dashed guard top is +7.55 m. The long enclosure wall uses warm-white plaster. Screen thickness is diagrammatic; this is a massing profile, not a stair section.


FULL STAIR GEOMETRY RETAINED

Continue the south dog-leg stair for another 3.00 m rise: 17 equal risers of 176.47 mm, 250 mm treads, and 900 mm clear flights and landing. See sheet 08 in this set for the developed stair profile.

HEIGHT AND AREA ARE EXPLICIT

Cap +9.00 m; roof landing +6.45 m; underside +8.85 m. Added enclosure 9.02 m²; conservative combined enclosed/covered study area 126.84 m² / 1,365.28 sq ft. Finishes do not enlarge the proposed enclosure.

ROOF EXIT / NORTH SIDE

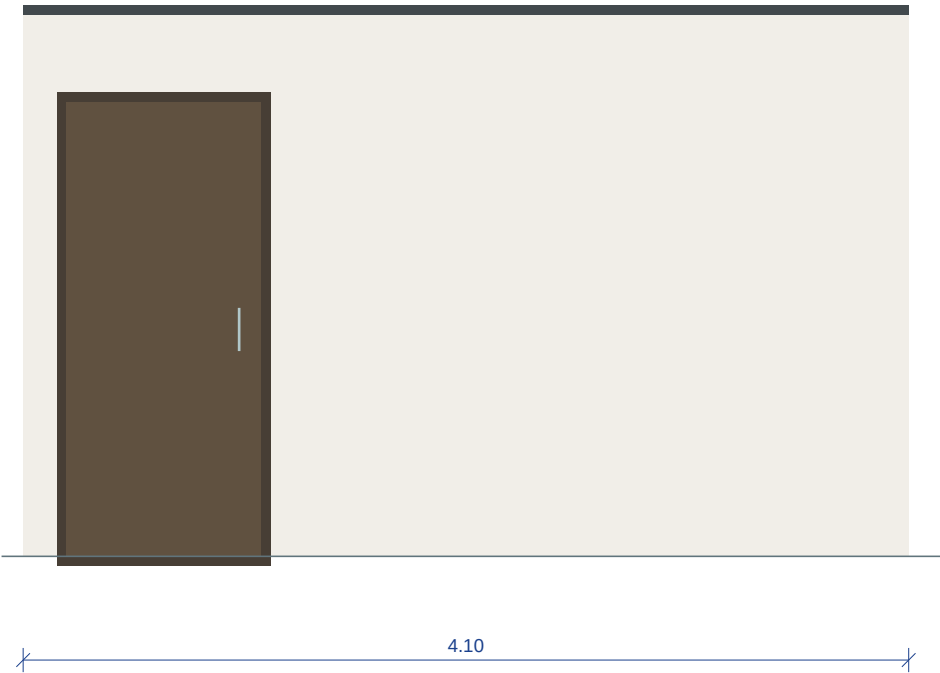

The door sits near the front end of the north wall and opens outward onto the roof. It is distinct from the master-bedroom balcony door one floor below. Confirm the finished threshold and landing drainage together.

Original style references / design context

REFERENCE IMAGES ONLY / NOT THE CURRENT OPENING ARRANGEMENT OR ROOF HEIGHT / NOT TO SCALE

ORIGINAL FRONT REFERENCE



Style source: white plaster, timber, rounded charcoal surrounds and recessed balconies. The current design adds the taller setback roof-stair enclosure and continuous roof guarding shown on sheets 05, 06, 09 and 11.

ORIGINAL REAR REFERENCE



The original rear photo shows superseded doors and an outdoor hearth. Current rear openings follow the plans: an independent ground service route, two upper toilet vents, master-bedroom side balcony entry, and a wash-only work area.

Current exterior / full roof access

PHOTOREALISTIC APPEARANCE STUDY / NOT TO SCALE / DIMENSIONED PLANS AND ELEVATIONS GOVERN



FRONT



REAR

Full-stair roof option - refer to dimensioned drawings

The stair enclosure has matching timber end walls, warm-white sides and a white/charcoal cap. It rises 1.60 m above the existing screen. Two toilet vents replace the former upper rear door; the master balcony entrance remains on the side.