

Complete house plans / full roof access

A3 COORDINATED DESIGN REVIEW SET / THREE BEDROOMS, THREE ENSUITES / R8 EXTERNAL WALLS 220 / 170 MM / R13 UNDER-STAIR COMPOSITION



FRONT

REAR

Full-stair roof option - refer to dimensioned drawings

DRAWING INDEX

- 01 Cover, index and design basis
- 02 Site, parking and main-floor area
- 03 Ground floor / R13 under-stair composition
- 04 First floor / roof-stair continuation
- 05 Roof plan / full-stair enclosure
- 06 Integrated front and rear elevations
- 07 Under-stair composition / headed wall opening
- 08 Developed stair profile / RCC slab depth
- 09 Conceptual structural framing
- 10 Roof setbacks and exit elevation
- 11 Original style references / context
- 12 Current exterior appearance

Print on A3 at 100% / actual size. Each drawing states its scale. Do not scale the photographs or the developed stair diagram horizontally.

This set replaces the separate compact-v4 and integrated-roof review PDFs. The current design includes full stairs to the roof and one conceptual structural framing option. The R13 under-stair composition stands in the coordinated R10 wall opening - cut to +2.10 m, plastered header retained above; a full-height removal is not assumed.

FOR ARCHITECT / BUILDER REVIEW



Dimensioned vectors govern over the render. The stair is shown as a conceptual RCC waist-slab system only; its waist thickness, landing beams, supports, reinforcement and connections must be designed by a structural engineer. Measured site set-out, structural design, stair headroom, waterproofing, services and permit drawings remain to be coordinated by the project professionals.

COORDINATED DESIGN BASIS

R8 external walls: 220 mm ground, 170 mm first. Ground floor: 59.30 m2 / 638.3 sq ft. First floor: 58.51 m2 / 629.8 sq ft. Roof enclosure: 9.02 m2 / 97.09 sq ft additional.
Conservative total: 126.84 m2 / 1,365.3 sq ft. Roof landing +6.45 m; stair cover +9.00 m. Rear balcony entry is on the master-bedroom side wall, with two toilet vents facing the rear.

Ground floor / under-stair joinery and washbasin, one continuous run

R15 / 16 SEP 2026 / PLAN 1:55 AT A3 / BASIN MOVED INTO THE JOINERY RUN / STAIR, ARCHWAY AND CIRCULATION UNCHANGED

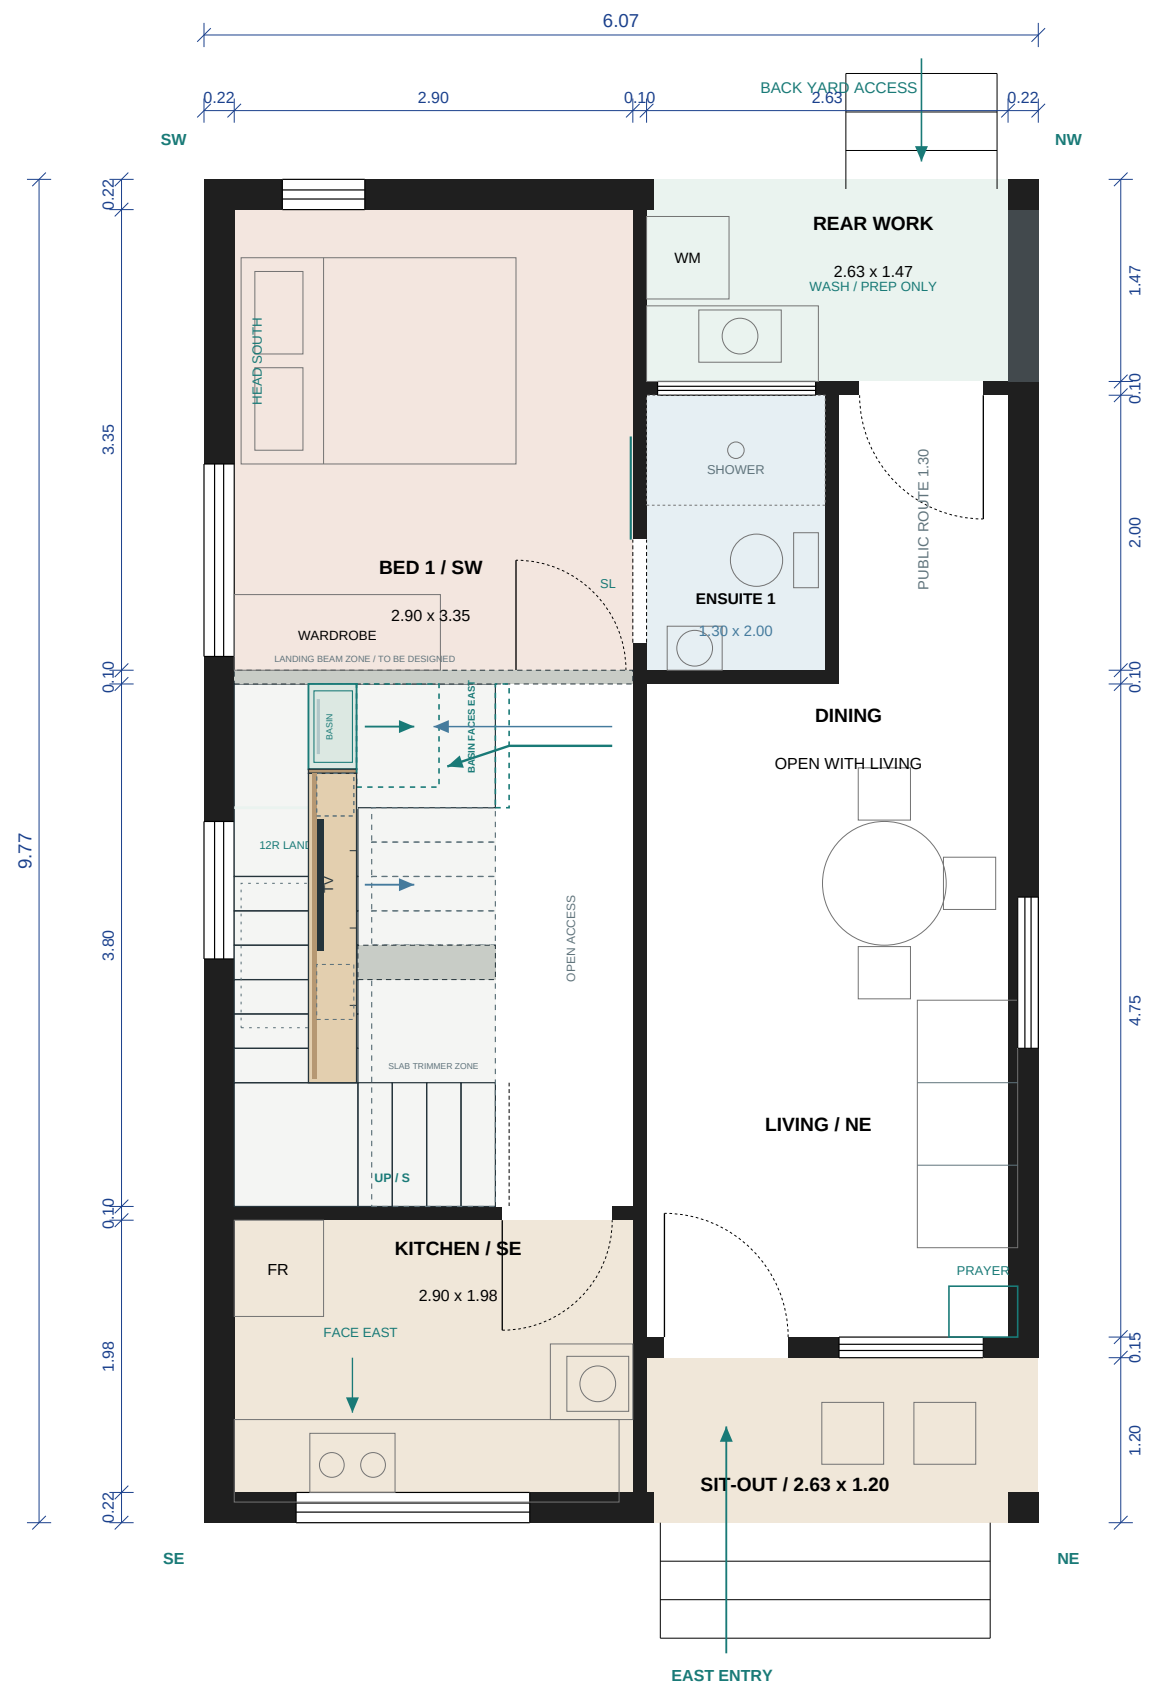

RISER SHIFT: STARTER 2 -> 5, UPPER FLIGHT 7 -> 4

R9 moves 3 risers from the upper return flight into the starter flight, using floor already inside the stair's own footprint. The west flight keeps its exact R2 tread positions, renumbered 3 risers higher. The intermediate landing rises from riser 9 to riser 12 (+0.53 m); the upper flight needs only 4 risers instead of 7, so its run shrinks from 1.75 to 1.00 m and the trimmer moves from y = 3.45 to y = 4.2. All 17 risers stay 176.47 mm; the first-to-roof stair is untouched.

R15 / BASIN MOVED INTO THE JOINERY RUN, FACING THE SAME WAY

R15 takes the basin out of the corner against the bedroom wall and continues the joinery run with it: a 0.62 x 0.35 m vanity at x = 0.69-1.04, y = 5.48-6.10, on the same depth and the same face plane at x = 1.04, facing EAST like the screen across the bay. You come in through the unchanged 0.90 m archway and the basin is square in front of you. The oak backing runs on behind it to the wall and carries the mirror; a full-height fin at y = 5.45-5.48 keeps splash off the joinery. Rim +0.86 m, mirror 0.40 x 0.80 m and the 750 x 600 mm standing zone are all unchanged. Clear height is now a uniform 1.95 m under the 12R landing, still short of the 2.20 m benchmark. Supply and waste run behind the backing into the y = 6.10 wall, to be coordinated with the plumbing design.

R14 / TV JOINERY MOVED UNDER THE LOWER FLIGHT

R14 moves the fitted TV joinery out of the stair-side wall line and into the volume under the LOWER / WEST FLIGHT, where the real raking soffit is and where the space was dead. The unit is 2.25 x 0.35 m at x = 0.69-1.04, y = 3.20-5.45, facing EAST across the stairwell and read from the living room through the retained 2.00 m headed opening about 1.35 m away. A 30 mm oak backing at x = 0.72-0.75 follows the flight underside, held 60 mm clear the whole way, rising with the flight and then running level under the 12R landing slab. A 43-inch screen, 0.96 x 0.54 m, is surface-mounted on the backing at centreline y = 4.64, centre +0.87 m, in the taller portion; a low shelf sits beside it and a two-shelf end bay closes the run at the nook end. The cabinet is capped at +0.45 m on a recessed lit plinth, its face at x = 1.04 just clear of the flight edge at x = 1.05 and its balustrade at x = 1.07. Nothing is built against the stair-side wall any more and nothing enters the 1.00 m living passage.

THE WALL OPENED TO +2.10, THE HEADER RETAINED, AND THE STORAGE TRADE

The 100 mm stair-side partition is cut away over the 2.00 m span from floor level to +2.10 m only, and retained above as a plastered header to the 2.85 m slab soffit - the coordinated R10 condition, which sheet 11 and the framing data are drawn to and which R12 holds. A FULL-HEIGHT REMOVAL WITH NO HEADER IS NOT ASSUMED AND MUST NOT BE INFERRED FROM THE JOINERY; it needs separate structural and architectural verification. The consequence, stated plainly: from the living room you look through that opening, under the header, straight across the stairwell to the joinery under the lower flight; the upper flight above +2.10 m is concealed by the header. Because that header stands from +2.10 m to the slab and the flight tread tops run +2.29 to +2.82 m, the east side of the flight is enclosed by wall and no balustrade is required. The opening must still be confirmed with the rest of the stair support system. Enclosed storage is the base cabinet alone - about 0.265 m³, against 0.86 m³ in the withdrawn R10 wedge and 3.5 m³ in the store R9 deleted.

CONCEPTUAL STRUCTURE / ARCHITECTURE OTHERWISE LOCKED

STAIR SHOWN AS CONCEPTUAL RCC WAIST-SLAB SYSTEM. FINAL WAIST-SLAB THICKNESS, LANDING BEAMS, SUPPORT CONDITIONS, REINFORCEMENT AND CONNECTIONS TO BE DESIGNED BY STRUCTURAL ENGINEER. 100 MM PARTITION WALLS ARE NOT TO BE ASSUMED LOAD-BEARING. No revision through R15 moves a riser, flight, landing, support zone, slab trimmer, wall opening or archway; R15 moves the basin only, within the room it already had. Every other wall, door and window keeps its R2 geometry.

First floor / two bedrooms, two ensuites

DIMENSIONED PLAN / 1:55 AT A3 / TWO BEDROOMS, TWO ENSUITES, STUDY AND BALCONIES



FRONT MATCHES THE REFERENCE

The left window belongs to the study/family space. The front balcony is on the right, over the ground-floor sit-out, with a recessed sliding door and glass railing.

BEDROOMS IN SW AND NORTH

The southwest master retains 2.90 x 3.35 m clear dimensions; its west and rear walls grew outward, so nothing inside it moved. The north bedroom is a 2.68 x 3.60 m rectangle (9.65 m²) after the 170 mm east wall thickened inward. Each bedroom has its own door into its own ensuite: 1.30 x 2.00 m, and 1.28 x 2.00 m for Ensuite 3 against that east wall.

NO BEDROOM IN THE SOUTHEAST

The southeast front room is a study/family space above the kitchen. The child's bedroom is in the north band. The master stays southwest, with southward bed-head orientation.

REAR DRYING TERRACE

The covered rear balcony remains above the work area. Access is now through a side door from the master bedroom, not through either ensuite. It is private to the master; the front balcony remains accessible from the common gallery.

TWO SEPARATE ENSUITES


Ensuite 2 serves only the master and stacks above Ensuite 1. Ensuite 3 serves only Bedroom 3 and sits above the ground service passage, not a bedroom or kitchen. The two bathrooms are separated by a full-height wall. The south stair continues to the roof; see sheets 05 and 08 for roof access.

AREA AND STRUCTURE

The whole first-floor envelope is counted at 58.51 m² (6.02 x 9.72 m over 170 mm external walls), including the stair opening and both covered balconies. Columns, beams, slab thickness and wet-area waterproofing must be engineered without reducing the shown clear routes.

Roof access / one compact enclosure

ROOF PLAN 1:55 AT A3 / FULL SOUTH STAIR / FRONT AND REAR FACADES RETAINED

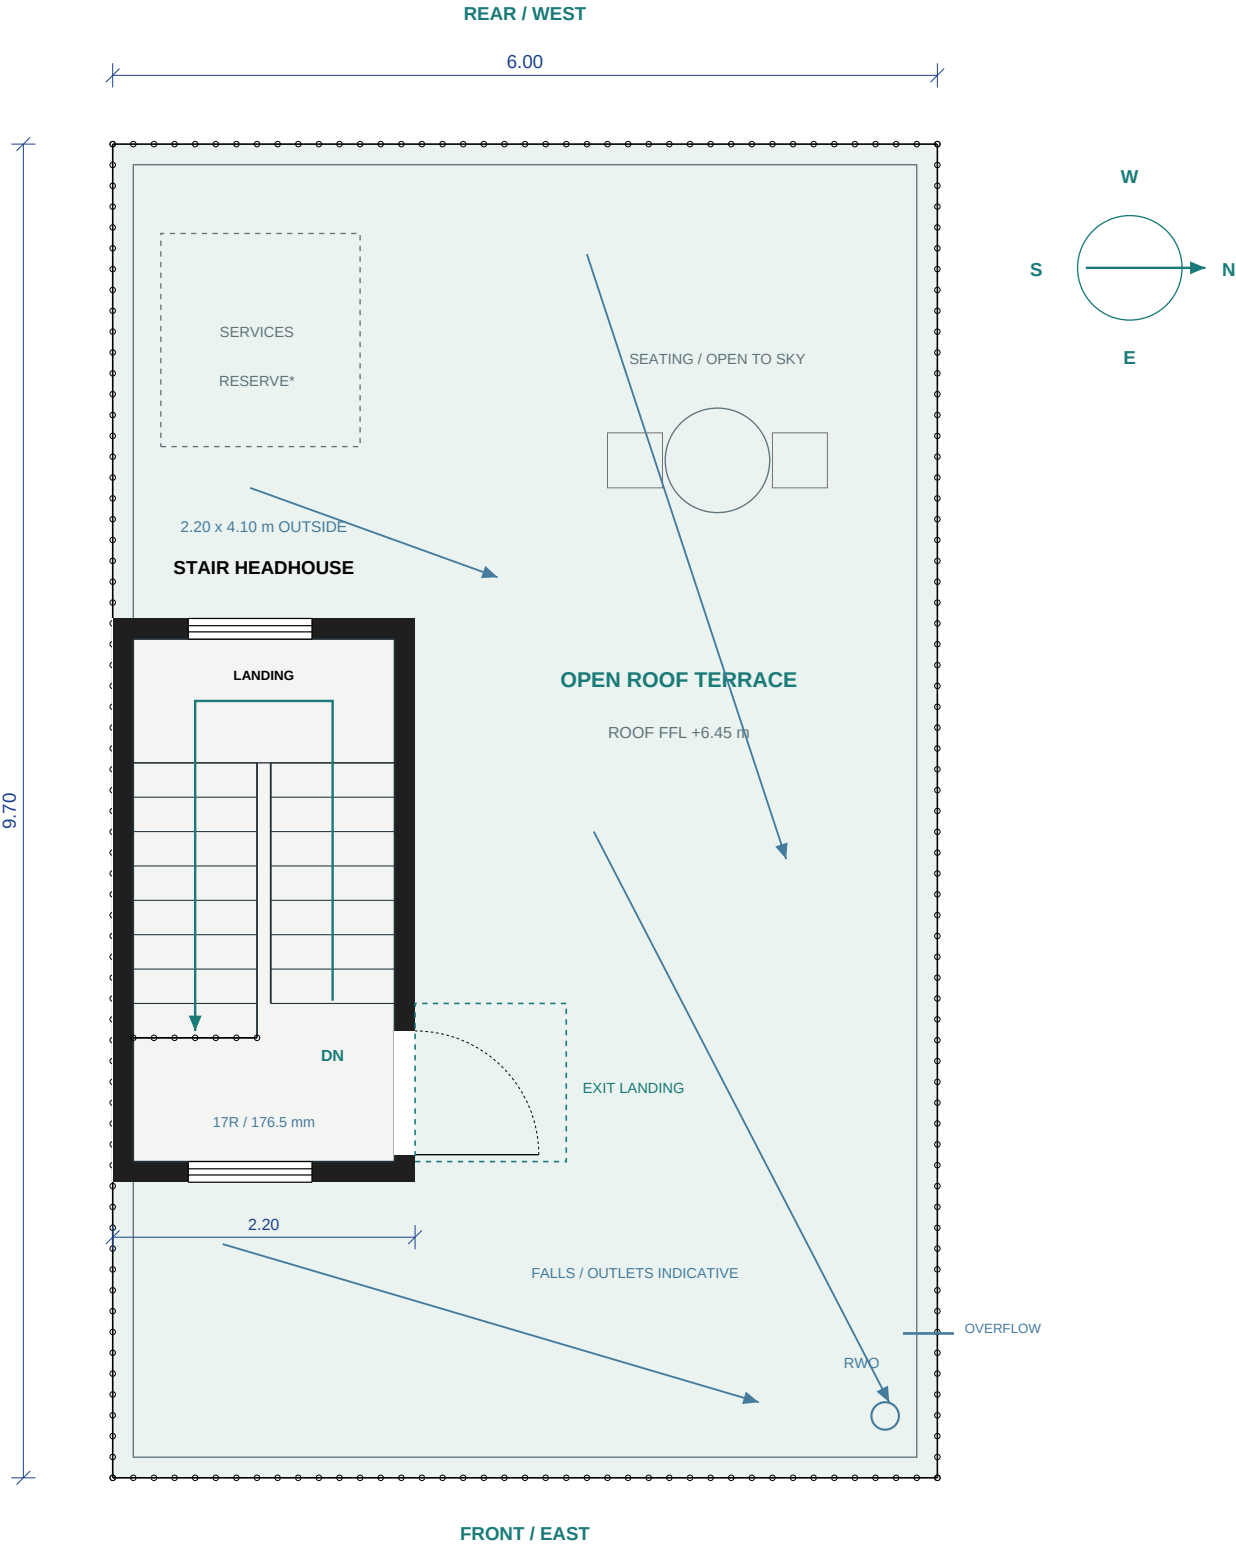

MATERIALS CONNECT THE TWO ROOF LEVELS

Use vertical timber-look cladding on the enclosure's east and west end walls to match the existing screen. Warm-white side walls and a shallow white fascia with a thin charcoal edge keep the upper enclosure visually light.

SAME STAIR, SAME FOOTPRINT

The roof enclosure remains 2.20 x 4.10 m outside, adding 9.02 m² / 97.1 sq ft. Its front face is set back 2.15 m; the rear face is set back 3.45 m. Ground and first floors remain 626.5 sq ft each.

KEEP THE OPEN ROOF USABLE

The 900 mm exit door opens onto the north-side roof landing. Keep its swing and approach clear. The perimeter guard is shown continuously at 1.10 m concept height; final infill and fixings need detailed design.

THE SILHOUETTE IS TALLER

The cap is +9.00 m, 1.60 m above the existing +7.40 m timber screen. The enclosure is narrower and set back, but remains visible. This option retains the approved first-floor rear canopy and toilet-vent arrangement.

DETAILING STILL TO COORDINATE

Cladding build-up must fit the stated envelope. Coordinate weathering, cap flashings, waterproofing, guard anchors, stair structure and clear headroom. Drainage arrows and the services reserve are inherited concept indications, not installation details.

A stepped roofline in the same materials


FRONT / REAR ELEVATIONS 1:55 AT A3 / FULL PROJECTED HEIGHTS, WITHOUT PERSPECTIVE CONCEALMENT

FRONT / EAST



The narrow timber-clad enclosure rises behind the existing front-left screen. Repeat its white cap and dark edge; retain the front balcony, windows and entrance below.


REAR / WEST

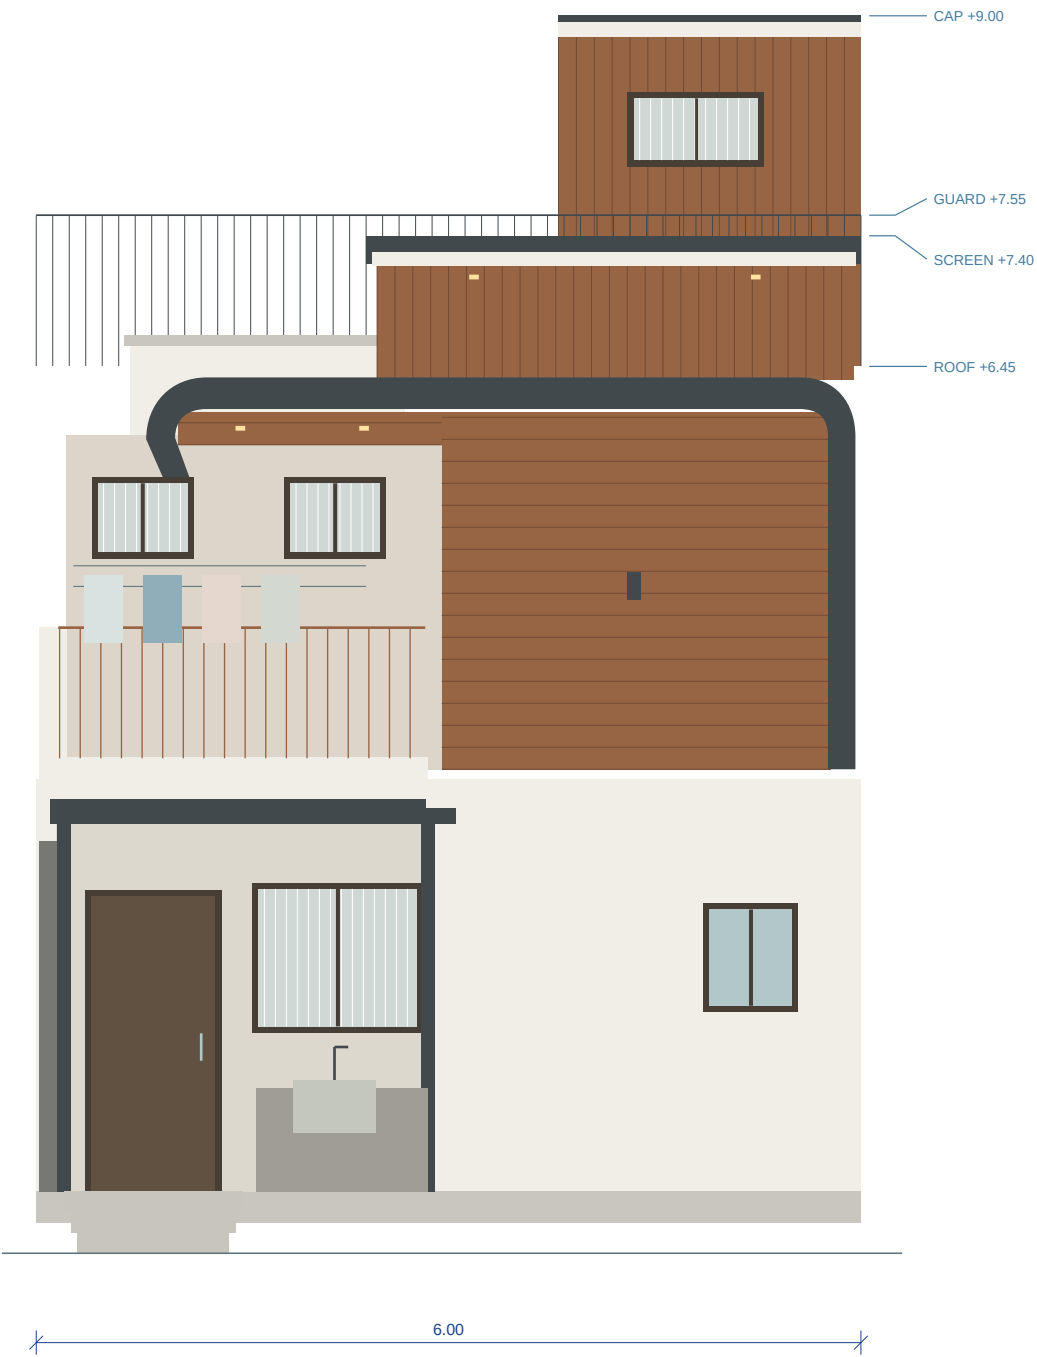

At the rear the enclosure sits behind the right timber screen. The open left drying balcony, short curved canopy return, two toilet vents and concealed master side entry remain.

Under-stair built-in / joinery and basin in the lower-flight bay

R15 / 16 SEP 2026 / STAIR PLAN 1:25 AND BAY SECTIONS 1:40 AT A3 / STRUCTURE IS CONCEPTUAL MASSING, NOT A STRUCTURAL DESIGN

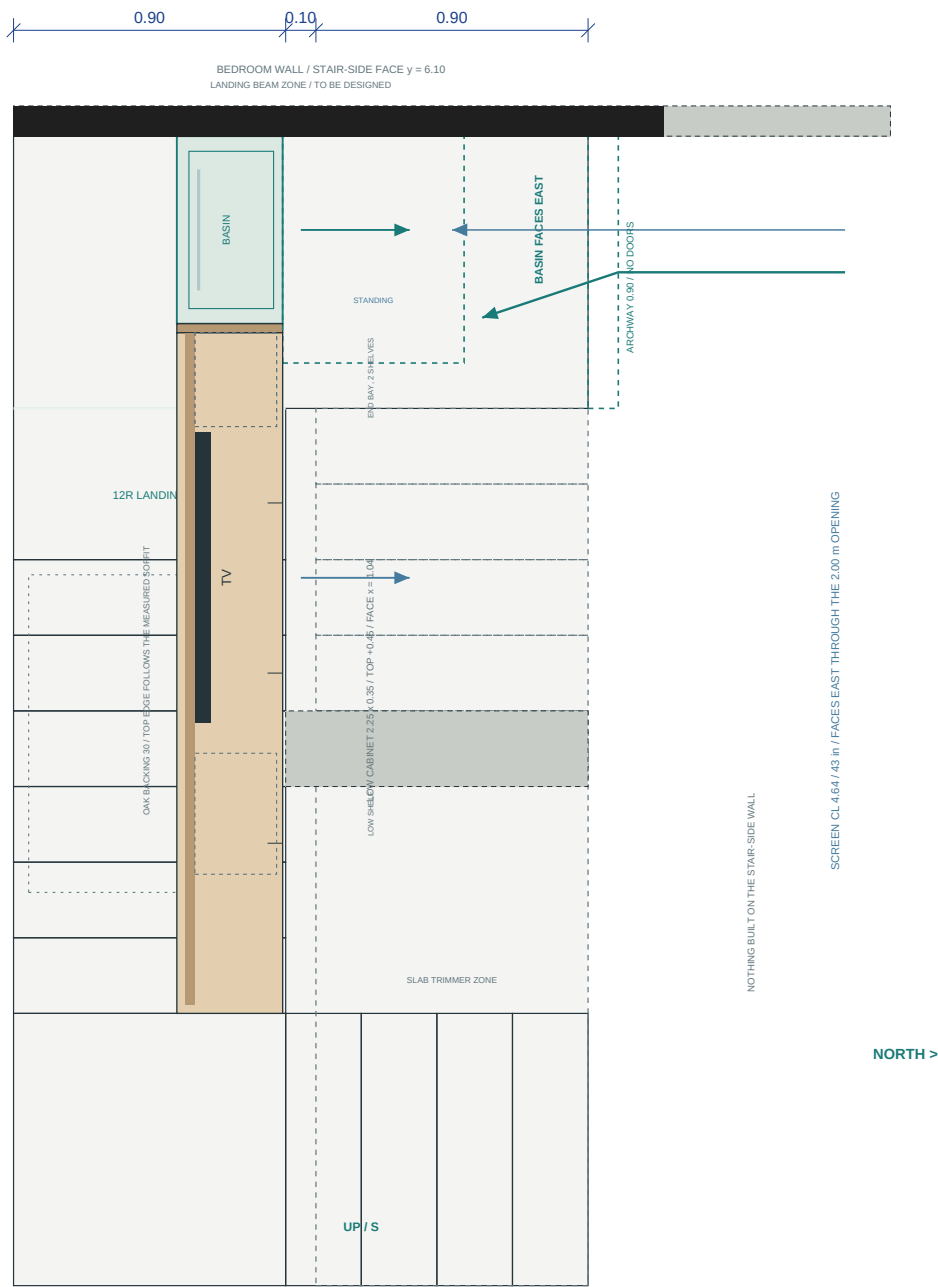

One continuous run in the bay that actually has the raking soffit

The R12 stair, all risers, flights, landings, trimmer, structural support conditions and retained +2.10 to +2.85 m plastered header are unchanged, as is the 0.90 m doorless archway. R14 emptied the upper-flight bay and built the joinery into the lower-flight bay, under a real 1.50 m rake. R15 now brings the basin across into that same bay, on the same depth and the same face plane, so the under-stair volume reads as one continuous 2.90 m fitted run instead of a joinery run plus a separate corner fitting. The upper-flight bay is left completely empty.

1 / RISER SHIFT, 5 + 7 + 4-PLUS-ARRIVAL

Starter grows from 2 to 5 risers inside the stair's own footprint. West flight keeps its exact R2 tread positions, renumbered 3 risers higher (6-12). The intermediate landing rises from riser 9 to riser 12 (+0.53 m). The upper flight needs only 4 risers instead of 7, so the trimmer moves from y = 3.45 to y = 4.2.

2 / R15 / BASIN CONTINUES THE RUN, 0.62 x 0.35 m, FACING EAST

The vanity leaves the bedroom wall and continues the joinery run at x = 0.69-1.04, y = 5.48-6.10: same 0.35 m depth, same face plane at x = 1.04, same EAST orientation as the screen opposite, so it is read face-on from the archway. Counter, drawer, vessel, mixer and the +0.86 m rim are unchanged; the vanity gains 0.12 m because the bay runs to the wall. The mirror moves onto the oak backing, still 0.40 x 0.80 m at z = 1.00-1.80, and a full-height fin at y = 5.45-5.48 screens the joinery from splash. Standing zone 750 x 600 mm at x = 1.04-1.64; clear height a uniform 1.95 m under the 12R landing. Supply and waste run behind the backing into the y = 6.10 wall - TO BE COORDINATED WITH THE PLUMBING DESIGN.


3 / R14 / 2.25 m LONG x 0.35 m DEEP, UNDER THE LOWER FLIGHT

R14 moved the fitted TV joinery into the volume under the LOWER / WEST FLIGHT, where the real raking soffit is. The unit is 2.25 x 0.35 m at x = 0.69-1.04, y = 3.20-5.45, facing EAST and read from the living room through the retained 2.00 m headed opening. A 30 mm oak backing at x = 0.72-0.75 follows the flight underside 60 mm clear. A 43-inch screen, 0.96 x 0.54 m, sits at centreline y = 4.64, centre +0.87 m; a low shelf and a two-shelf end bay close the run. The cabinet is capped at +0.45 m on a recessed lit plinth, face at x = 1.04 just clear of the flight edge.


4 / CONCEPTUAL RCC STAIR / EVERYTHING ELSE LOCKED

STAIR SHOWN AS CONCEPTUAL RCC WAIST-SLAB SYSTEM. FINAL WAIST-SLAB THICKNESS, LANDING BEAMS, SUPPORT CONDITIONS, REINFORCEMENT AND CONNECTIONS TO BE DESIGNED BY STRUCTURAL ENGINEER. 100 MM PARTITION WALLS ARE NOT TO BE ASSUMED LOAD-BEARING. Support: plinth, west external wall, landing beam zone in the bedroom cross-wall and the trimmer at y = 4.2. Partition cut below +2.10 m, header retained above.

SECTION / UPPER-FLIGHT BAY / LOOKING SOUTH / 1:40 / CONCEPTUAL RCC

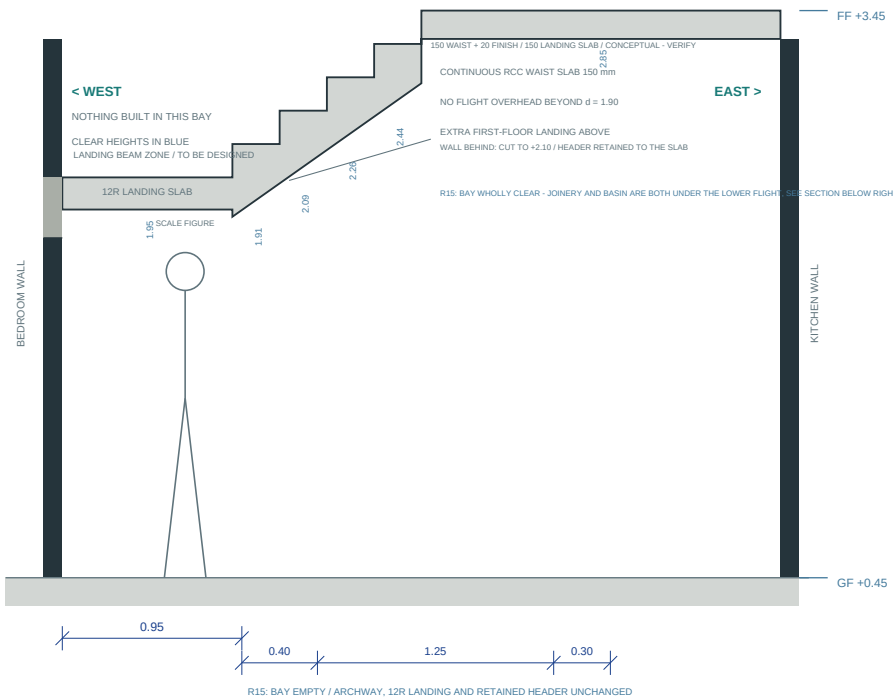


SECTION / LOWER-FLIGHT BAY / JOINERY AND BASIN / 1:40

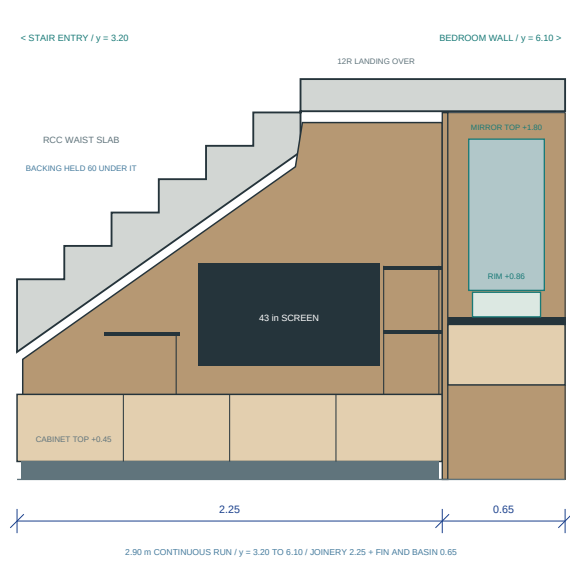

Same R2 tread positions, now risers 6-12. Backing held 60 mm clear of the real flight underside; 2.25 x 0.35 m cabinet, then the full-height fin, then the 0.62 m vanity to the wall - one face plane at x = 1.04 throughout, all facing EAST. Waist slab conceptual.

First-floor stair and roof headroom


R14 / 16 SEP 2026 / PROPOSED FIRST-FLOOR STAIR 1:35 / DEVELOPED STAIR PROFILE 1:50 AT A3 / CONCEPTUAL RCC WAIST AND LANDING SLABS

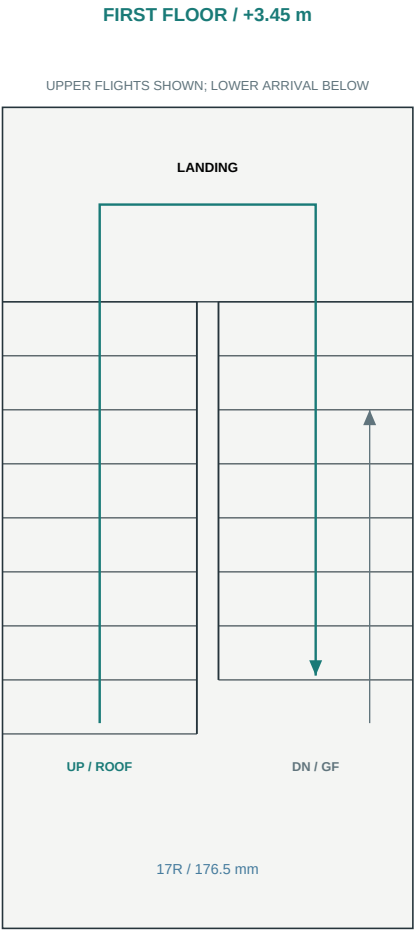

Remove the former guard across the bottom of the upward flight at first-floor level. The north return flight lands from below; the south flight begins the next rise to the roof.

Two rises of 3.00 m, each 17 risers of 176.47 mm and 250 mm treads. R9 redistributed the ground risers (5 + 7 + 4-plus-arrival); first-to-roof keeps 9 + 8. WALKING-LINE HEADROOM IS NOT UNIFORM AND BOTH GROUND FLIGHTS ARE UNDER THE 2.20 m BENCHMARK: west flight 1.73 m, upper return 2.09 m; first-to-roof 2.67 m and 2.40 m. R9 raised the west flight 0.53 m toward the parallel flight above; the 2.26 m once stated here was pre-R9. RESOLVE IN THE DESIGN.

The existing +7.40 m decorative screen is too low to be a roof-access enclosure. The new stair cover is +9.00 m, set back 2.15 m from the front and 3.45 m from the rear. Setbacks reduce visibility; they do not guarantee an unchanged roof silhouette.

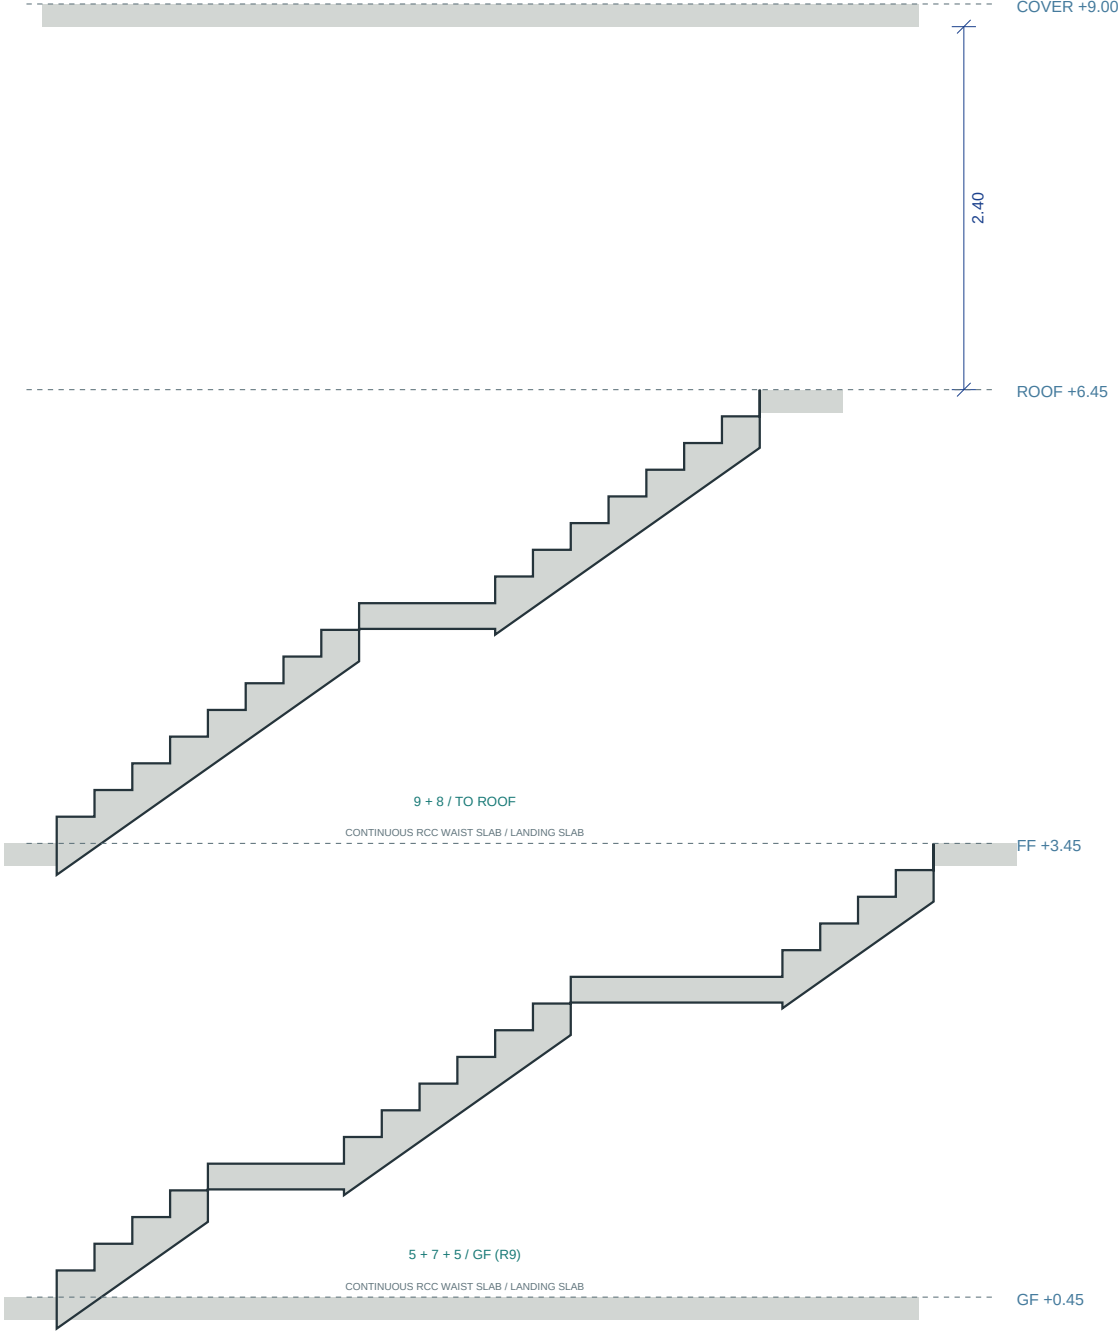


UNFOLDED PATHS / NOT HORIZONTAL SET-OUT / 150 mm WAIST + 20 mm FINISH, INDICATIVE

Developed paths: GF has a 5 + 7 + 4-plus-arrival riser turn (R9, was 2 + 7 + 8) and neither R10, R12 nor R14 touches it; first-to-roof retains 9 + 8 unchanged, so the stair continues to the roof exactly as before. Each flight shows its slab depth and soffit, landing on the plinth, the landing slabs and the floor slabs. STAIR SHOWN AS CONCEPTUAL RCC WAIST-SLAB SYSTEM. FINAL WAIST-SLAB THICKNESS, LANDING BEAMS, SUPPORT CONDITIONS, REINFORCEMENT AND CONNECTIONS TO BE DESIGNED BY STRUCTURAL ENGINEER. 100 MM PARTITION WALLS ARE NOT TO BE ASSUMED LOAD-BEARING.

Conceptual structural framing

R7 / 10 SEP 2026 / TYPICAL FRAMING PLAN 1:55 AT A3 / ONE COORDINATED OPTION, NOT A STRUCTURAL DESIGN

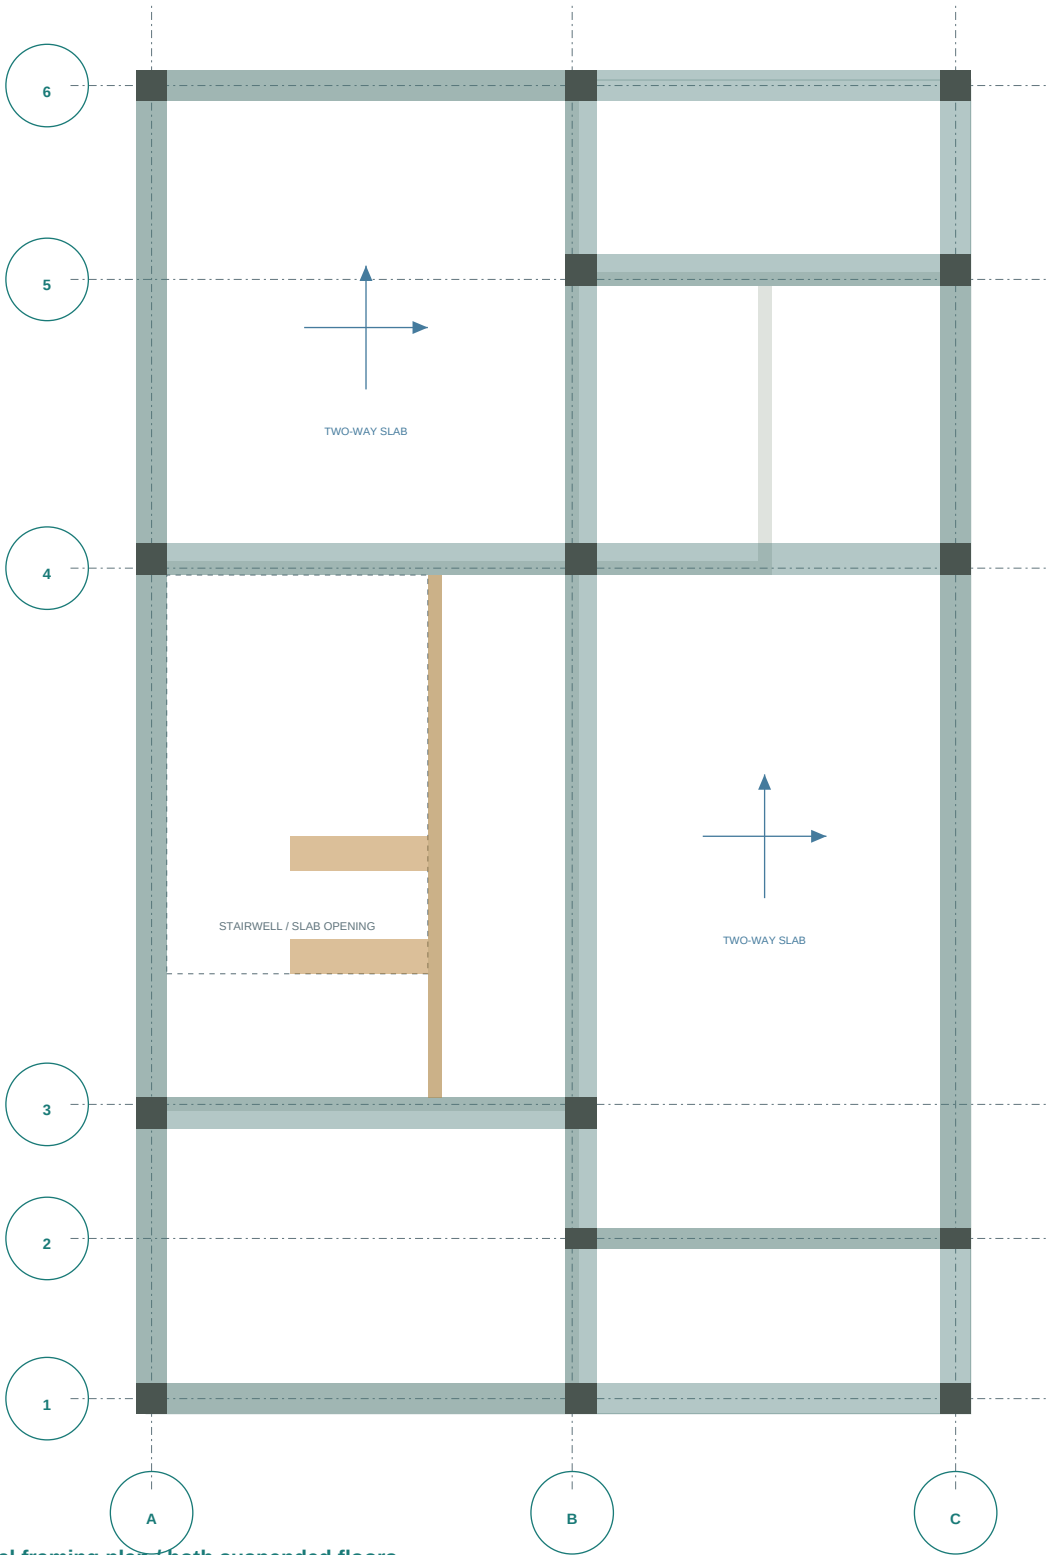

Typical framing plan / both suspended floors

Solid = column zones. Green = beam lines. Amber = stairwell trimmers. Ghosted grey = the existing walls, for location only.

THE GRID

Three longitudinal and six transverse lines, every one set out on a wall or pier that already exists. A / B / C = west external wall, central spine line with its piers, east external wall. 1 to 6 = front face, sit-out edge, kitchen/stair wall, bedroom wall, rear cross wall, rear face.

COLUMNS

15 column zones. Fourteen fall on an existing wall junction or an existing pier. Only C4 is new: it stands inside the 150 mm east external wall beside the rear service passage, added to keep the grid C span under 5 m. No column stands free of a wall, on the stair, or in the under-stair unit.

HOW MEMBERS ARE SIZED HERE

Members are drawn at the thickness of the host wall where that is 150 mm, so they stay concealed. On a 100 mm wall they are drawn 230 mm wide, carried across the wall to one declared side: B east into the living side, 3 south into the kitchen, 4 north into Bedroom 1, 5 north into the rear work area. Grids 3 and 4 matter - the other way would leave 2.20 m over the stair starter landing and clash with the R9 basin against the bedroom wall. 230 mm is indicative only.

BEAMS AND SLABS


21 beam lines. The longest is C: C2-C4 at 4.88 m in the east external wall; the shortest runs 0.97 m. Floor slabs are the 150 mm two-way slabs already assumed, spanning between the grid beams, with the stairwell trimmed as shown - two amber zones now, since R9 moved the ground-to-first trimmer to y = 4.2 while the first-to-roof trimmer stays at y = 3.2-3.45. A3 and A4 continue to the stair-cover at +9.00 m. Grid 4 A4-B4 is the stair landing beam, now carrying riser 12. R10 adds no member: it removes the 100 mm stair-side partition below +2.10 m between y = 3.20 and 5.20 for the built-in TV unit, retains a plastered header above it off the stair-side trimmer zone, and closes the first-floor slab over the arrival landing R9 extended to y = 4.20. R12 changes the joinery inside that opening and nothing else: the headed condition drawn here still governs, and a full-height removal with no header is not assumed and must not be inferred. The ground floor is on grade.

COORDINATION TO RESOLVE

Column C4 is the only member not already implied by an existing wall junction or pier. It stands inside the 150 mm east external wall beside the rear service passage and takes no room area. Foundations, plinth beams and the ground-slab build-up are not shown and are entirely for the engineer.

STATUS

STRUCTURE SHOWN AS CONCEPTUAL FRAMING MASSING ONLY. COLUMN AND BEAM SIZES, SLAB THICKNESSES, REINFORCEMENT, FOUNDATIONS AND HOW THE BEAM DEPTH SITS IN THE STOREY DIAGRAM MATTER. THE GRID AND MEMBER POSITIONS ARE ONE COORDINATED OPTION, NOT A STRUCTURAL DESIGN. 100 MM PARTITION WALLS ARE NOT TO BE ASSUMED LOAD-BEARING.

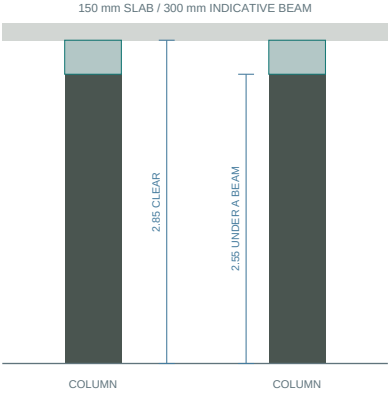


Walls are 2.85 m clear. An indicative 300 mm downstand leaves about 2.55 m under a beam line. Beam soffits, drops and any flush-beam or band-beam alternative are the engineer's to decide.

Setbacks, height and the roof exit

LONGITUDINAL MASSING PROFILE 1:50 / ENCLOSURE NORTH ELEVATION 1:35 AT A3

SOUTH-WING PROFILE / FRONT AT LEFT

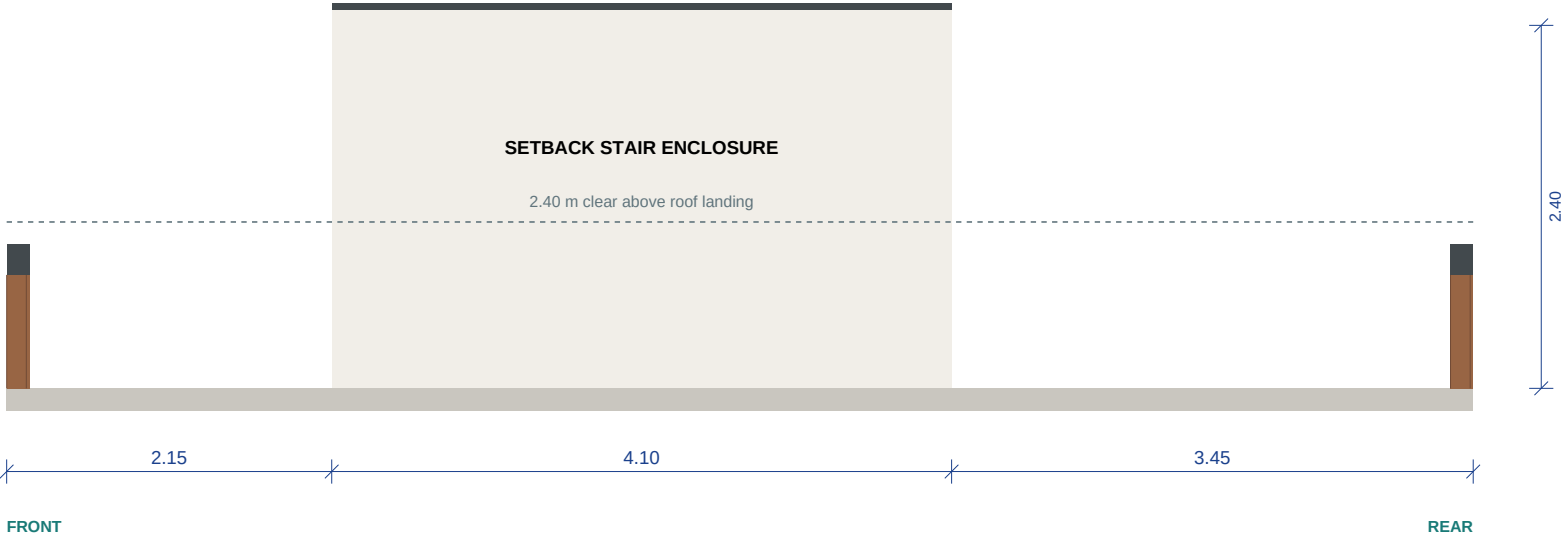

The foreground screens stay at +7.40 m. The new cap is +9.00 m; the dashed guard top is +7.55 m. The long enclosure wall uses warm-white plaster. Screen thickness is diagrammatic; this is a massing profile, not a stair section.

FULL STAIR GEOMETRY RETAINED

Continue the south dog-leg stair for another 3.00 m rise: 17 equal risers of 176.47 mm, 250 mm treads, and 900 mm clear flights and landing. See sheet 08 in this set for the developed stair profile.

HEIGHT AND AREA ARE EXPLICIT

Cap +9.00 m; roof landing +6.45 m; underside +8.85 m. Added enclosure 9.02 m²; conservative combined enclosed/covered study area 125.42 m² / 1,350.0 sq ft. Finishes do not enlarge the proposed enclosure.

ROOF EXIT / NORTH SIDE



The door sits near the front end of the north wall and opens outward onto the roof. It is distinct from the master-bedroom balcony door one floor below. Confirm the finished threshold and landing drainage together.

Original style references / design context

REFERENCE IMAGES ONLY / NOT THE CURRENT OPENING ARRANGEMENT OR ROOF HEIGHT / NOT TO SCALE

ORIGINAL FRONT REFERENCE



Style source: white plaster, timber, rounded charcoal surrounds and recessed balconies. The current design adds the taller setback roof-stair enclosure and continuous roof guarding shown on sheets 05, 06, 09 and 11.

ORIGINAL REAR REFERENCE



The original rear photo shows superseded doors and an outdoor hearth. Current rear openings follow the plans: an independent ground service route, two upper toilet vents, master-bedroom side balcony entry, and a wash-only work area.

Current exterior / full roof access

PHOTOREALISTIC APPEARANCE STUDY / NOT TO SCALE / DIMENSIONED PLANS AND ELEVATIONS GOVERN



FRONT



REAR

Full-stair roof option - refer to dimensioned drawings

The stair enclosure has matching timber end walls, warm-white sides and a white/charcoal cap. It rises 1.60 m above the existing screen. Two toilet vents replace the former upper rear door; the master balcony entrance remains on the side.