Complete house plans / full roof access

A3 COORDINATED DESIGN REVIEW SET / THREE BEDROOMS, THREE ENSUITES / R8 EXTERNAL WALLS 220 / 170 MM / R20 FIT-OUT / R19 OPEN STAIR SIDE / R18 STORAGE / INTERNAL WALLS 150 MM INCLUDING PLASTER



FRONT



REAR

R20 finishes - full-stair roof option - refer to dimensioned drawings

COORDINATED DESIGN BASIS

External walls: 220 mm ground, 170 mm first. Internal walls: 150 mm finished including plaster. Ground floor: 59.30 m2 / 638.3 sq ft. First floor: 58.51 m2 / 629.8 sq ft. Roof enclosure: 9.02 m2 / 97.09 sq ft additional. Conservative total: 126.84 m2 / 1,365.3 sq ft. Roof landing +6.45 m; stair cover +9.00 m. Rear balcony entry is on the master-bedroom side wall, with two toilet vents facing the rear.

DRAWING INDEX

01	Cover, index and design basis
02	Site, parking and main-floor area
03	Ground floor / 150 mm finished internal walls
04	First floor / open stair passage and storage
05	Roof plan / full-stair enclosure
06	Integrated front and rear elevations
07	Under-stair composition / headed wall opening
08	Developed stair profile / RCC slab depth
09	Conceptual structural framing
10	Roof setbacks and exit elevation
11	Original style references / context
12	Current exterior appearance

Print on A3 at 100% / actual size. Each drawing states its scale. Do not scale the photographs or the developed stair diagram horizontally.


This set replaces the separate compact-v4 and integrated-roof review PDFs. The current design includes full stairs to the roof and one conceptual structural framing option. Internal walls are 150 mm total including plaster. Connected wall faces are flush; 400 mm wardrobe lofts and lift-up bed bases keep bedroom footprints. R19 opens the first-floor stair side below its retained overhead band with vertical guards and oak rails. R20 coordinates the accepted interior images: oak wardrobe doors with ivory lofts, kitchen uppers and pantry, ensuite vanities, dining set, terrace pergola and honey-oak exterior timber. Stair clearances and the 900 mm first-floor passage are retained. The R15 under-stair composition stands in the coordinated R10 wall opening - cut to +2.10 m, plastered header retained above; a full-height removal is not assumed.


FOR ARCHITECT / BUILDER REVIEW

Dimensioned vectors govern over the render. The stair is shown as a conceptual RCC waist-slab system only; its waist thickness, landing beams, supports, reinforcement and connections must be designed by a structural engineer. Measured site set-out, structural design, stair headroom, waterproofing, services and permit drawings remain to be coordinated by the project professionals.

A smaller footprint. More useful yard.

SITE STUDY / 1:100 AT A3 / ROOF ENCLOSURE ADDITIONAL: 9.02 m2 / 97.1 SQ FT

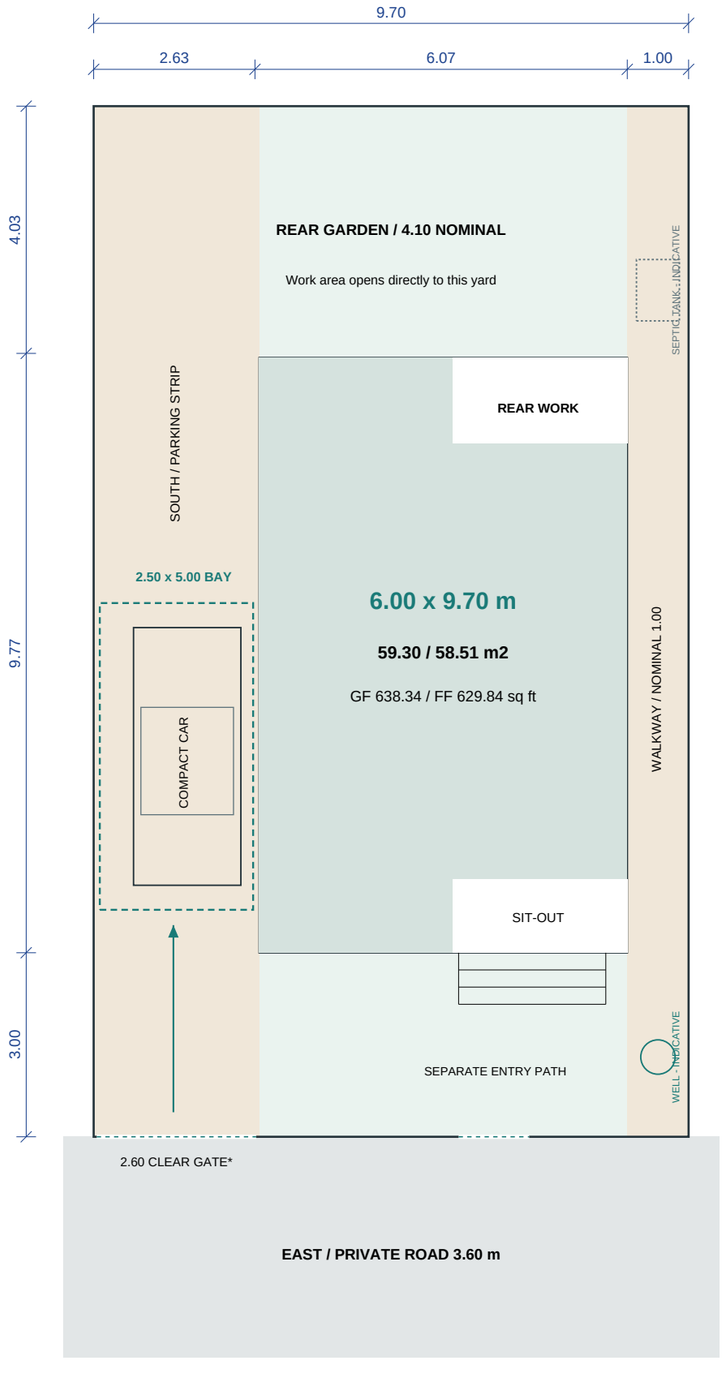



AREA LIMIT / COUNTED CONSERVATIVELY

Ground external envelope	**59.30 m2 / 638.3 sq ft**
First external envelope	**58.51 m2 / 629.8 sq ft**
Main floors only (roof additional)	**117.82 m2 / 1,268.2 sq ft**
Included on each floor	**Walls, stairs + covered open spaces**

SIDE PARKING - FITS AS A SPACE STUDY

A 2.50 x 5.00 m stall fits in the nominal 2.70 m south strip. The drawn car is 1.75 x 4.20 m without mirrors. This is for a compact car, with tight door clearance; no covered carport is added.

THE GATE IS THE UNRESOLVED PART

The 3.60 m road, boundary-wall thickness and actual vehicle turning circle control entry. The arrow shows approach only, not a verified swept path. Confirm with the real car and surveyed gate position; do not infer parking approval from this rectangle.

SOURCE PLOT IS SLIGHTLY SKEWED

The 4-cent plot sketch gives 9.70 m frontage/rear and side lengths 16.82 / 16.84 m, with 1.62 are stated area. This study uses a nominal 9.70 x 16.80 m rectangle. The separate old site plan has different geometry; a measured boundary overlay is needed before fixing yard clearances.

WALKWAY AND BUILDING EDGES


Keep the north path free of equipment and the south parking strip free of projecting fins or drains. Yard widths shown are nominal wall-to-boundary distances, not guaranteed finished clear widths. Front and rear steps sit in the yards.


INDICATIVE WELL AND SEPTIC POSITIONS

A well/borewell is marked in the northeast corner and a septic tank in the northwest corner, about 12.5 m apart along the plot depth. KPBR 2019 Rule 75 requires at least 7.5 m between any well and a septic tank or soak pit, plus 1.2 m from boundaries; this does not clear reliably across the 9.7 m width, only along the 16.8 m depth. Confirm exact points, and check for any neighbouring well within 7.5 m, with the panchayat engineer.

Ground floor / fitted bedroom storage, open living connection

R20 / 23 OCT 2026 / FIT-OUT COORDINATED WITH THE ACCEPTED IMAGES / PLAN 1:55 AT A3 / INTERNAL WALLS 150 MM INCLUDING PLASTER

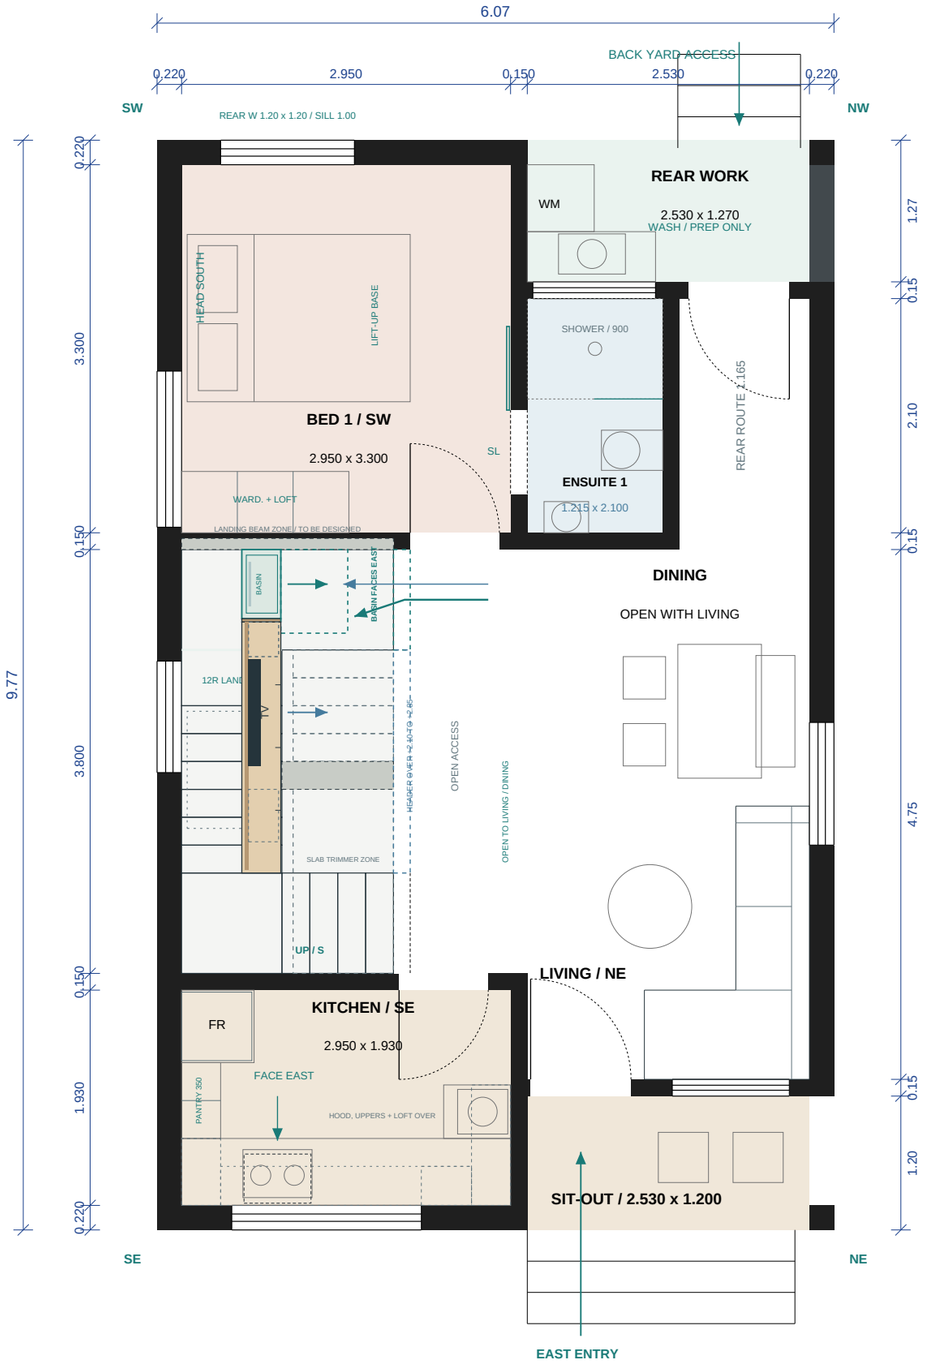



BEDROOM 1 WINDOW / RETAINED FITTED STORAGE

Rear window enlarged to 1200 x 1200 mm: sill +1.00 m, head +2.20 m above bedroom floor. Side window remains 1400 x 1200 mm. Coordinate lintel and opening details with the existing frame. The 1500 x 550 mm fitted wardrobe, now with oak main doors and ivory lofts, retains its 400 mm loft to +2.50 m. Narrow paired leaves, the 2000 x 1500 mm lift-up bed and aligned 150 mm finished walls retain their footprints.

ROOM CLEARANCES / COMPACT, COORDINATED FITTINGS

Both southwest bedrooms are 2.950 x 3.300 m. The double bed has 625 mm beside it on both sides and 865 mm at its foot with the sliding leaf parked (900 mm to the wall). Ensuite 1 is 1.215 x 2.100 m with a 900 mm deep shower and a maximum 550 mm installed WC projection, leaving 665 mm in front. The service route is 1.165 m clear. Rear work is 2.530 x 1.270 m; a 450 mm preparation counter leaves an 820 mm aisle. Compact clearances; coordinate tiles and the selected fixtures.

LIVING AND DINING / OPEN CONNECTION

No floor-level partition right of OPEN ACCESS: the passage opens to living and dining. The dashed outline marks the OVERHEAD header from +2.10 to +2.85 m. The stair-side opening is 2.00 m long; the basin archway remains 0.90 m wide.

FITTED TV AND BASIN / EXISTING LOWER-FLIGHT BAY

The 2.25 x 0.35 m cabinet stays at x = 0.69-1.04, y = 3.20-5.45; its oak backing follows the stair underside 60 mm clear, screen centre +0.87 m on a full-motion mount. The 0.62 x 0.35 m basin continues the run to y = 6.10, facing EAST through the archway, behind the full-height oak fin. R20: under-counter basin, oak-framed 0.40 x 0.80 m mirror and one charcoal sconce; the stair-soffit strip is removed. Rim +0.86 m, standing zone 750 x 600 mm and 1.95 m clear height are retained, below this set's 2.20 m benchmark. Coordinate supply and waste behind the backing.

R20 KITCHEN AND DINING

Kitchen: oak uppers, ivory loft bridge, slim charcoal hood, 350 mm full-height pantry and oak-panelled fridge housing (fridge max 0.60 m wide). Dining: 1.20 x 0.75 m table, two wishbone chairs, window bench, dimmable cane globe pendant; 0.85 m to the rear route. Hood duct to coordinate.

STAIR / RETAINED TREADS AND HEADED OPENING

The R9 ground stair retains 17 risers at 176.47 mm, with 5 starter, 7 west-flight and 4 upper-flight risers plus arrival. The 12R landing and trimmer at y = 4.20 stay fixed. Landing support ends at x = 2.05, clear of the bedroom door; its end bearing requires design. The 150 mm finished partition is open below +2.10 m and retains a 0.75 m plastered header to the 2.85 m slab soffit. Full-height removal with no header is not assumed; separate architectural and structural verification would be required.


DIRECTIONS AND STRUCTURAL COORDINATION

Compass and directional rooms retained: southeast kitchen, southwest bedroom, northeast living, south stairs. Not a Vastu certification. STAIR AND FRAME ARE CONCEPTUAL ONLY: members, partition loads, landing supports, reinforcement and connections require structural design; no member has been reduced to hide a step. Partitions are not assumed load-bearing.

First floor / open stair passage and fitted storage

R20 / 23 OCT 2026 / OPEN STAIR SIDE WITH GUARDS / PLAN 1:55 AT A3 / PASSAGE 900 MM DESIGN CLEAR





R18 / FITTED WARDROBES AND LINEN STORAGE

All wardrobes keep their footprints and gain 400 mm lofts above the 2100 mm main units. R20: muted oak main doors, ivory lofts and sides, narrow paired leaves and short recessed pulls. Cabinet tops at 2500 mm leave 50 mm below the indicative beam soffit; the space above is left open. Bedroom 3 has a continuous 90-degree L carcass with no solid filler. The study opens to the stairs below the retained beam. A 750 x 450 mm ivory linen cabinet sits beside the tailoring benches, which now have oak waterfall ends. All beds gain lift-up storage bases.

BEDROOMS IN SW AND NORTH

R17 aligns the central wall faces through both floors. The southwest master is 2.950 x 3.300 m; Bedroom 3 is 2.580 x 3.575 m. The passage stays 900 mm clear. Both ensuites are rebalanced to 1.215 x 2.100 m, with a 900 mm deep shower zone and compact WC. Ensuite 3 uses a surface-sliding door to avoid the bed and fixtures.

NO BEDROOM IN THE SOUTHEAST

The southeast room remains a study above the kitchen. Bed heads retain their southward orientation. The master keeps 625 mm at each side of the double bed and 865 mm at its foot with the sliding leaf parked (900 mm to the wall). Bedroom 3 keeps 625 mm to its wardrobe, 600 mm behind the bed and 580 mm at the foot: compact, with a sliding ensuite door.

REAR DRYING TERRACE

The covered rear balcony remains above the work area, now 2.580 x 1.220 m clear. Its 850 mm side door is at y = 8.60. R20 makes the north end a ventilated oak-tone louvre screen; the long rear railing stays open. Access stays private to the master.

OPEN STAIR SIDE / GUARDED PASSAGE


The first-floor stair-side partition opens below +2.55 m; the overhead beam/soffit band to +2.85 m remains. Slim charcoal vertical guards with oak rails protect the passage drop and upper return flight. Proposed guards are 1100 mm high with 100 mm maximum baluster centre pitch. The former wall band is reserved for edge/guard details; the passage keeps its 900 mm design clear width. Level stair entry remains open. The gallery boundary, bedrooms and private ensuites are retained. Verify support, rail connections and fixings.


WALL THICKNESS, AREA AND STRUCTURE

Gross floor envelope remains 58.51 m2 / 629.84 sq ft, including stairs and covered balconies. Walls are 150 mm total including plaster. Bathroom WC projection is limited to 550 mm installed, giving 665 mm clear in front; it is a compact layout. Coordinate carrier/cistern, tiles, services and structural pier sizes without consuming the published clearances.

Roof access / one compact enclosure

ROOF PLAN 1:55 AT A3 / FULL SOUTH STAIR / FRONT AND REAR FACADES RETAINED

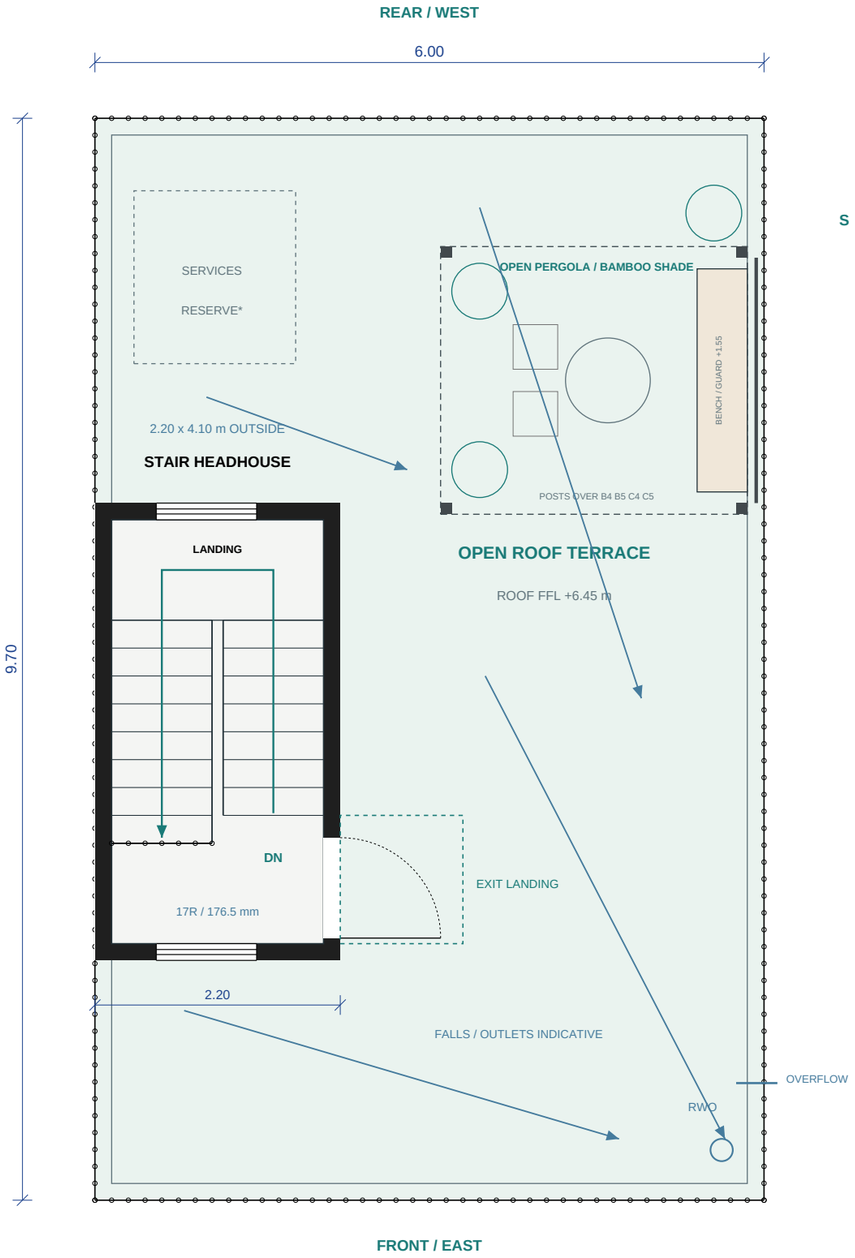



MATERIALS CONNECT THE TWO ROOF LEVELS

R20: every exterior timber surface uses one warm honey-oak tone. Oak is kept to the entrance panel, balcony ceiling and adjacent strip, the enclosure end walls and the rear; the front roof-level screen is warm-white render with downlights. A white fascia with a thin charcoal edge keeps it light.

R20 TERRACE PERGOLA AND BENCH

An open charcoal steel pergola with bamboo shade stands on four posts over the B4, B5, C4 and C5 column zones; it is not a roof or added floor area. A masonry bench lines the north parapet, where the guard rises to 1.10 m above the seat (+1.55 m). Post anchors, uplift and waterproofing to be designed; confirm local covered-area rules.

SAME STAIR, SAME FOOTPRINT

The roof enclosure remains 2.20 x 4.10 m outside, adding 9.02 m2 / 97.1 sq ft. Its front face is set back 2.15 m; the rear face is set back 3.45 m. Ground remains 638.34 sq ft; first remains 629.84 sq ft. Internal alignment changes do not enlarge either footprint.

KEEP THE OPEN ROOF USABLE

The 900 mm exit door opens onto the north-side roof landing. Keep its swing and approach clear. The perimeter guard is shown continuously at 1.10 m concept height; final infill and fixings need detailed design.

THE SILHOUETTE IS TALLER

The cap is +9.00 m, 1.60 m above the existing +7.40 m roof screen. The enclosure is narrower and set back, but remains visible. This option retains the approved first-floor rear canopy and toilet-vent arrangement.

DETAILING STILL TO COORDINATE

Cladding build-up must fit the stated envelope. Coordinate weathering, cap flashings, waterproofing, guard anchors, stair structure and clear headroom. Drainage arrows and the services reserve are inherited concept indications, not installation details.

A stepped roofline in the same materials


FRONT / REAR ELEVATIONS 1:55 AT A3 / FULL PROJECTED HEIGHTS, WITHOUT PERSPECTIVE CONCEALMENT

FRONT / EAST



The narrow timber-clad enclosure rises behind the existing front-left screen. R20: honey-oak timber throughout, oak front door and woven oak seating; retain the front balcony, windows and entrance below.


REAR / WEST

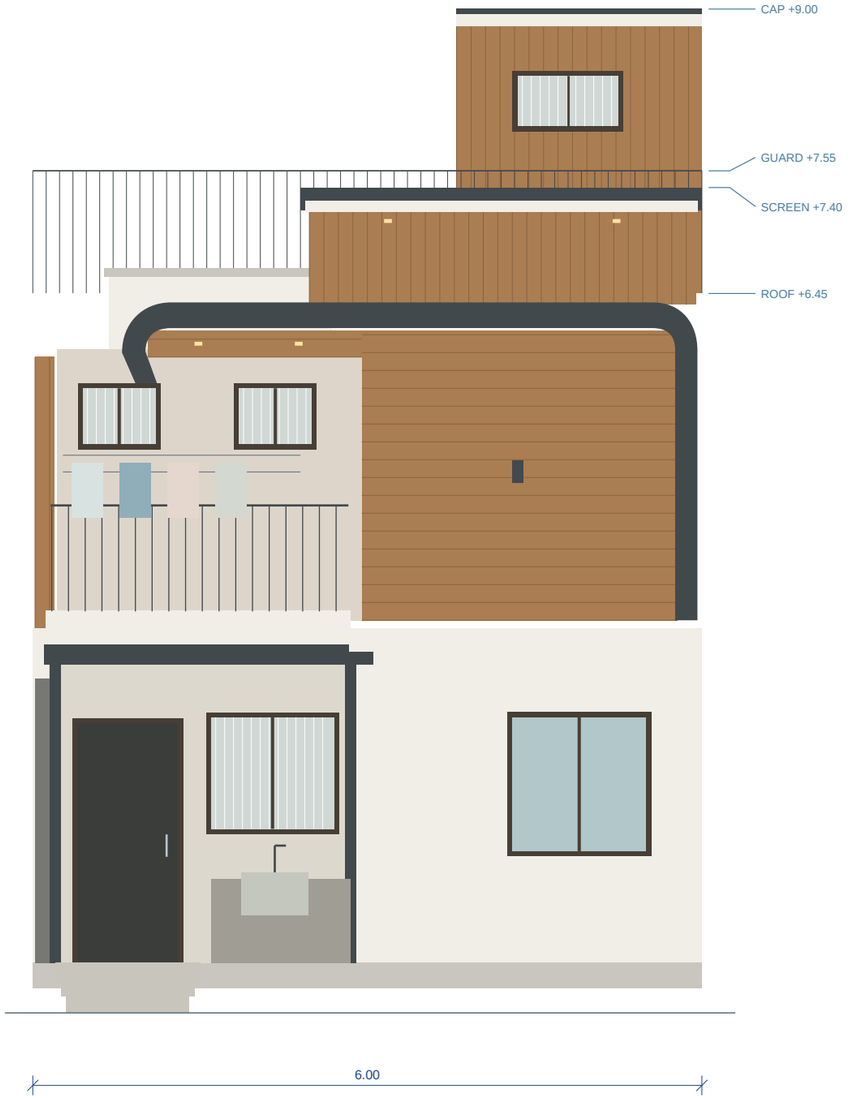

At the rear the enclosure sits behind the right timber screen. The open left drying balcony gains an oak-tone louvre screen at its north end; the canopy return, toilet vents, charcoal rear door and master side entry remain.

Under-stair built-in / joinery and basin in the lower-flight bay

R20 / 23 OCT 2026 / STAIR PLAN 1:25 AND BAY SECTIONS 1:40 AT A3 / STRUCTURE IS CONCEPTUAL MASSING, NOT A STRUCTURAL DESIGN

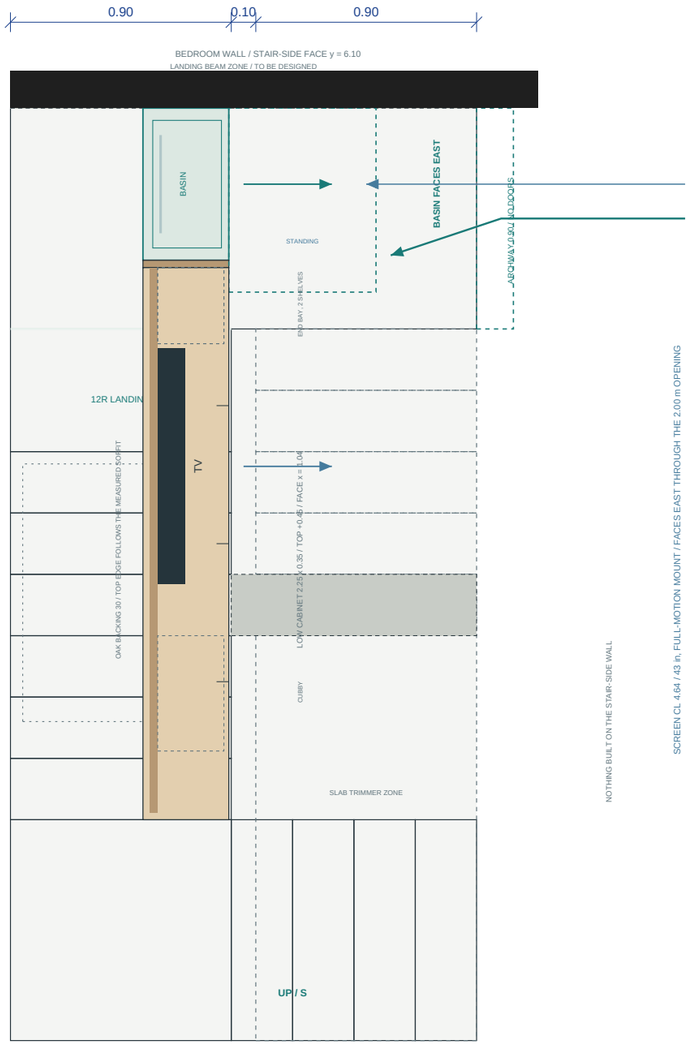

1 / RISER SHIFT, 5 + 7 + 4-PLUS-ARRIVAL

Starter grows from 2 to 5 risers inside the stair's own footprint. West flight keeps its exact R2 tread positions, renumbered 3 risers higher (6-12). The intermediate landing rises from riser 9 to riser 12 (+0.53 m). The upper flight needs only 4 risers instead of 7, so the trimmer moves from y = 3.45 to y = 4.2.

2 / R15 / BASIN CONTINUES THE RUN, 0.62 x 0.35 m, FACING EAST

The vanity leaves the bedroom wall and continues the joinery run at x = 0.69-1.04, y = 5.48-6.10: same 0.35 m depth, same face plane at x = 1.04, same EAST orientation as the screen opposite, so it is read face-on from the archway. R20 swaps the vessel for an under-counter basin, the backlit mirror for an oak-framed one and the downlight for a charcoal sconce; the +0.86 m rim is unchanged. The mirror stays 0.40 x 0.80 m at z = 1.00-1.80 on the oak backing, and a full-height fin at y = 5.45-5.48 screens the joinery from splash. Standing zone 750 x 600 mm at x = 1.04-1.64; clear height a uniform 1.95 m under the 12R landing. Supply and waste run behind the backing into the y = 6.10 wall - TO BE COORDINATED WITH THE PLUMBING DESIGN.


3 / R14 / 2.25 m LONG x 0.35 m DEEP, UNDER THE LOWER FLIGHT

R14 moved the fitted TV joinery into the volume under the LOWER / WEST FLIGHT, where the real raking soffit is. The unit is 2.25 x 0.35 m at x = 0.69-1.04, y = 3.20-5.45, facing EAST and read from the living room through the retained 2.00 m headed opening. A 30 mm oak backing at x = 0.72-0.75 follows the flight underside 60 mm clear. A 43-inch screen, 0.96 x 0.54 m, on a full-motion mount (R20) sits at centreline y = 4.64, centre +0.87 m; an open cubby at the stair end and a two-shelf end bay close the run. The cabinet is capped at +0.45 m on a recessed lit plinth, face at x = 1.04 just clear of the flight edge.


4 / CONCEPTUAL RCC STAIR / EVERYTHING ELSE LOCKED

STAIR SHOWN AS CONCEPTUAL RCC WAIST-SLAB SYSTEM. FINAL WAIST-SLAB THICKNESS, LANDING BEAMS, SUPPORT CONDITIONS, REINFORCEMENT AND CONNECTIONS TO BE DESIGNED BY STRUCTURAL ENGINEER. 150 MM FINISHED PARTITION WALLS ARE NOT TO BE ASSUMED LOAD-BEARING. Support: plinth, west external wall, landing beam zone in the bedroom cross-wall and the trimmer at y = 4.2. Partition cut below +2.10 m, header retained above.

SECTION / UPPER-FLIGHT BAY / LOOKING SOUTH / 1:40 / CONCEPTUAL RCC

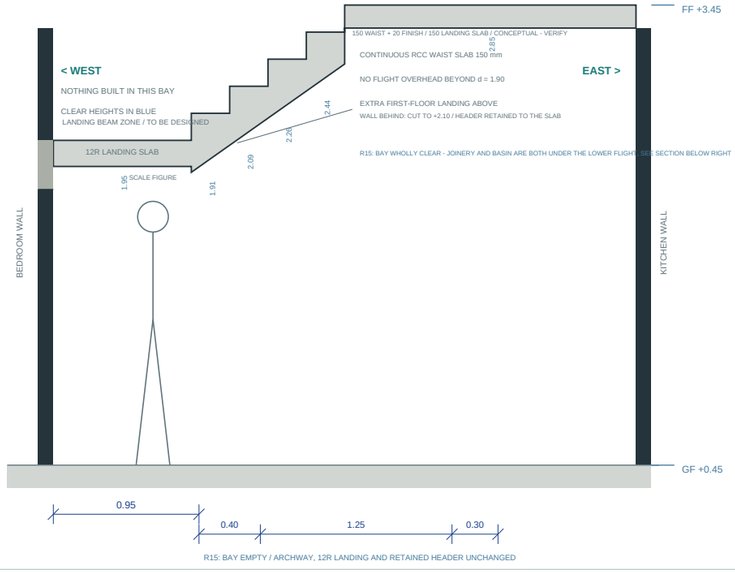

SECTION / LOWER-FLIGHT BAY / JOINERY AND BASIN / 1:40

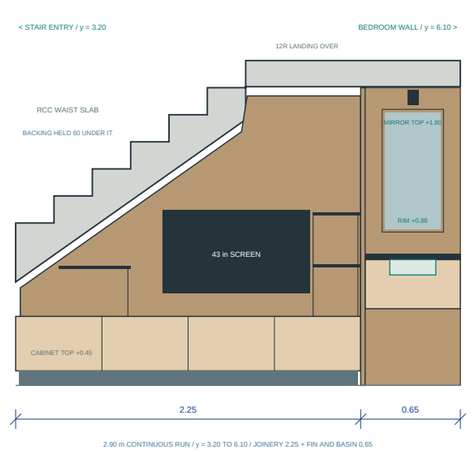

Same R2 tread positions, now risers 6-12. Backing held 60 mm clear of the real flight underside; 2.25 x 0.35 m cabinet, then the full-height fin, then the 0.62 m vanity to the wall - one face plane at x = 1.04 throughout, all facing EAST. Waist slab conceptual.


One continuous run in the bay that actually has the raking soffit

The R12 stair, all risers, flights, landings, trimmer, structural support conditions and retained +2.10 to +2.85 m header heights are unchanged. R16 grows the finished header to 150 mm toward living, keeping its stair face fixed, as well as the 0.90 m doorless archway. R14 emptied the upper-flight bay and built the joinery into the lower-flight bay, under a real 1.50 m rake. R15 now brings the basin across into that same bay, on the same depth and the same face plane, so the under-stair volume reads as one continuous 2.90 m fitted run instead of a joinery run plus a separate corner fitting. The upper-flight bay is left completely empty.

First-floor stair and roof headroom

R19 / 08 OCT 2026 / OPEN STAIR SIDE WITH GUARDS / FIRST-FLOOR STAIR 1:35 / DEVELOPED STAIR PROFILE 1:50 AT A3 / CONCEPTUAL RCC WAIST AND LANDING SLABS


FIRST FLOOR / +3.45 m

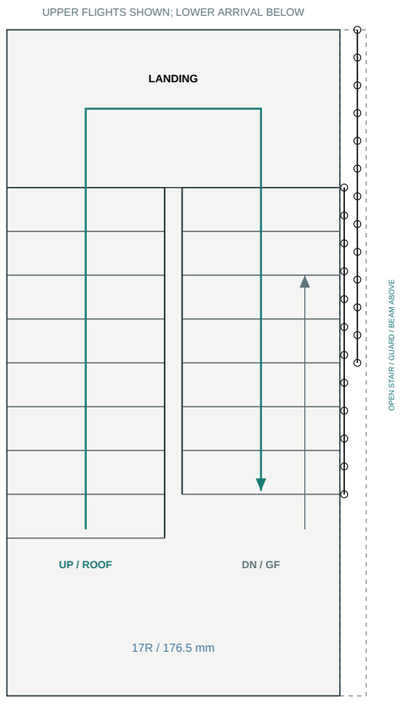

Remove the former guard across the bottom of the upward flight at first-floor level. The north return flight lands from below; the south flight begins the next rise to the roof.

Two rises of 3.00 m, each 17 risers of 176.47 mm and 250 mm treads. R9 redistributed the ground risers (5 + 7 + 4-plus-arrival); first-to-roof keeps 9 + 8. WALKING-LINE HEADROOM IS NOT UNIFORM AND BOTH GROUND FLIGHTS ARE UNDER THE 2.20 m BENCHMARK: west flight 1.73 m, upper return 2.09 m; first-to-roof 2.67 m and 2.40 m. R9 raised the west flight 0.53 m toward the parallel flight above; the 2.26 m once stated here was pre-R9. RESOLVE IN THE DESIGN.

The existing +7.40 m decorative screen is too low to be a roof-access enclosure. The new stair cover is +9.00 m, set back 2.15 m from the front and 3.45 m from the rear. Setbacks reduce visibility; they do not guarantee an unchanged roof silhouette.

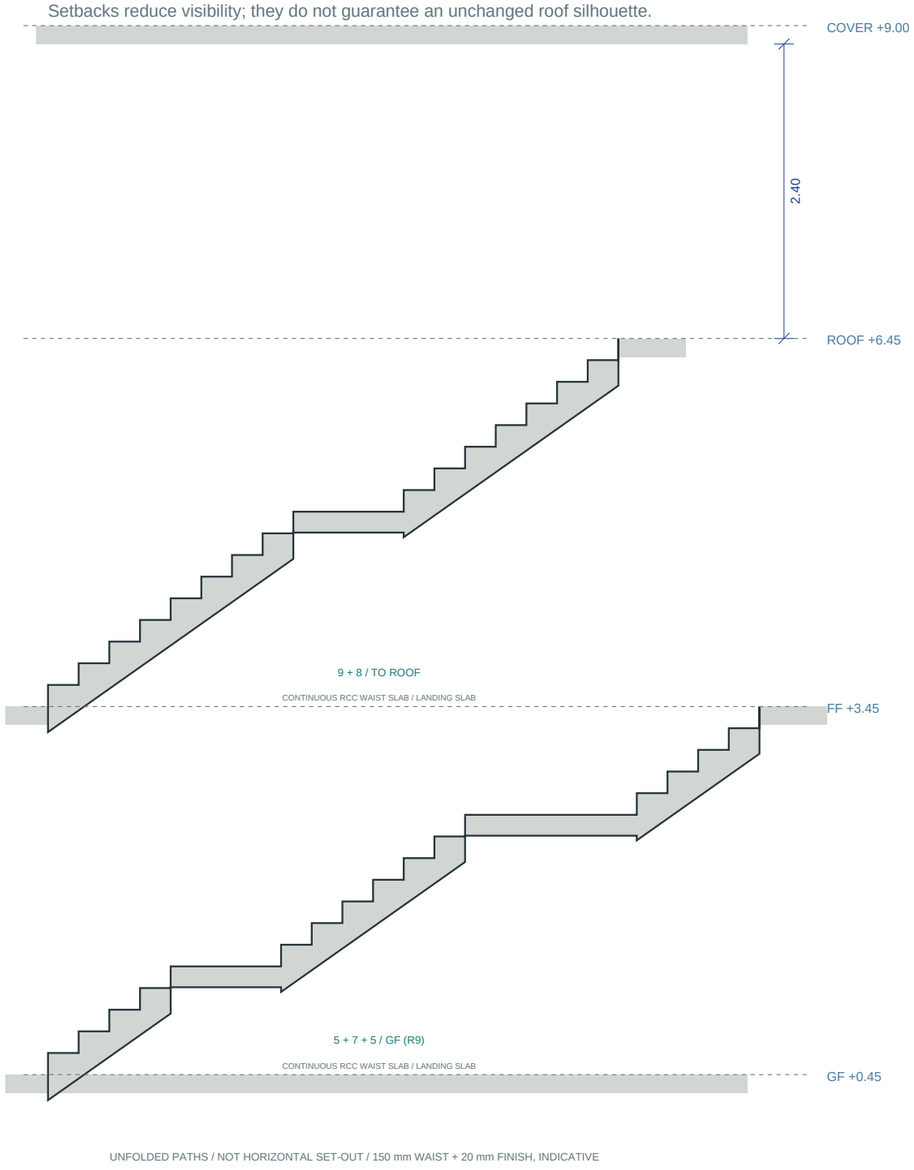


UNFOLDED PATHS / NOT HORIZONTAL SET-OUT / 150 mm WAIST + 20 mm FINISH, INDICATIVE

Developed paths: GF has a 5 + 7 + 4-plus-arrival riser turn (R9, was 2 + 7 + 8) and neither R10, R12 nor R14 touches it; first-to-roof retains 9 + 8 unchanged, so the stair continues to the roof exactly as before. Each flight shows its slab depth and soffit, landing on the plinth, the landing slabs and the floor slabs. STAIR SHOWN AS CONCEPTUAL RCC WAIST-SLAB SYSTEM. FINAL WAIST-SLAB THICKNESS, LANDING BEAMS, SUPPORT CONDITIONS, REINFORCEMENT AND CONNECTIONS TO BE DESIGNED BY STRUCTURAL ENGINEER. 150 MM FINISHED PARTITION WALLS ARE NOT TO BE ASSUMED LOAD-BEARING.

Conceptual structural framing

R17 WALL ALIGNMENT / 08 OCT 2026 / TYPICAL FRAMING PLAN 1:55 AT A3 / ONE COORDINATED OPTION, NOT A STRUCTURAL DESIGN

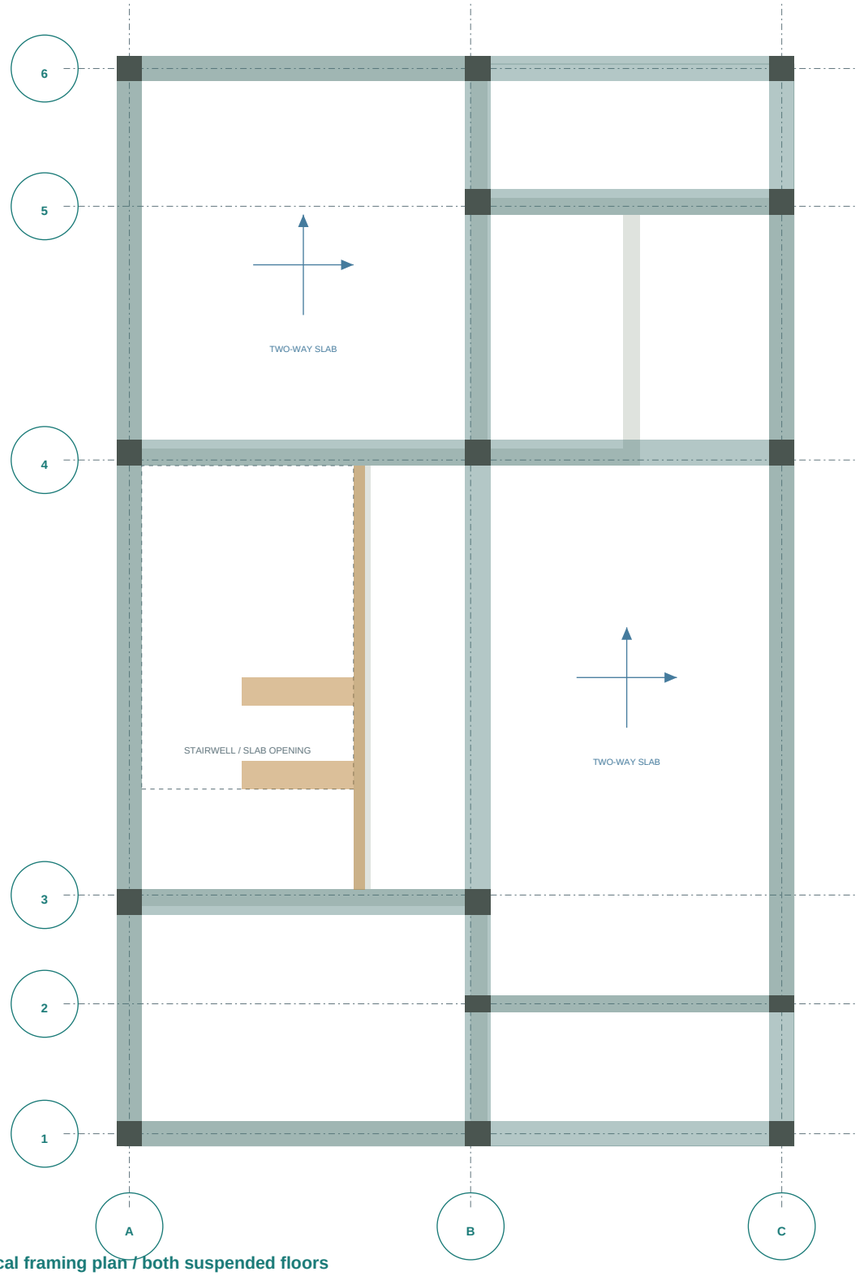

Typical framing plan / both suspended floors

Solid = column zones. Green = beam lines. Amber = stairwell trimmers. Ghosted grey = the existing walls, for location only.

THE GRID

Three longitudinal and six transverse lines, every one set out on a wall or pier that already exists. A / B / C = west external wall, central spine line with its piers, east external wall. 1 to 6 = front face, sit-out edge, kitchen/stair wall, bedroom wall, rear cross wall, rear face.

COLUMNS

15 column zones. Fourteen fall on an existing wall junction or an existing pier. Only C4 is new: it stands inside the 220 mm ground external wall beside the rear service passage, added to keep the grid C span under 5 m. No column stands free of a wall, on the stair, or in the under-stair unit.

HOW MEMBERS ARE SIZED HERE

R17 internal wall bands are 150 mm finished including plaster. The previously drawn conceptual member boxes and grid positions are retained for engineer review; 230 mm members can project beyond a partition. Grid B straddles the aligned wall band by 50 mm west / 30 mm east. Other projection sides: 3 south into the kitchen, 4 north into Bedroom 1, 5 north into the rear work area. Grids 3 and 4 matter - the other way would leave 2.20 m over the stair starter landing and clash with the R9 basin against the bedroom wall. 230 mm is indicative only.

BEAMS AND SLABS

21 beam lines; longest 4.88 m, shortest 0.97 m. Indicative floor slabs are 150 mm. Stair trimmers retain the ground arrival at y = 4.20 and the roof arrival at y = 3.45. The rear cross-beam grid follows the revised wall at y = 8.425. A3 and A4 continue to the +9.00 m stair cover. Grid 4 A4-B4 carries the 12R landing. The ground-floor stair-side opening retains its +2.10 to +2.85 m header. R19 opens the first-floor stair side below +2.55 m, retaining the overhead band to +2.85 m. Guard loads, fixings and connections need structural design; frame members remain unchanged. The ground floor is on grade.


COORDINATION TO RESOLVE

Column C4 is the only member not already implied by an existing wall junction or pier. It stands inside the 220 mm ground external wall beside the rear service passage and takes no room area. Foundations, plinth beams and the ground-slab build-up are not shown and are entirely for the engineer.

STATUS

CONCEPTUAL FRAMING ONLY. The revised rear grid and retained member sizes are an option for review, not a structural design. Column and beam sizes, partition loads, slab thicknesses, reinforcement, foundations and connections require engineering. Partitions are not assumed load-bearing.

HOW THE BEAM DEPTH SITS IN THE STOREY / DIAGRAMMATIC




Walls are 2.85 m clear. An indicative 300 mm downstand leaves about 2.55 m under a beam line. Beam soffits, drops and any flush-beam or band-beam alternative are the engineer's to decide.

Setbacks, height and the roof exit


LONGITUDINAL MASSING PROFILE 1:50 / ENCLOSURE NORTH ELEVATION 1:35 AT A3

SOUTH-WING PROFILE / FRONT AT LEFT

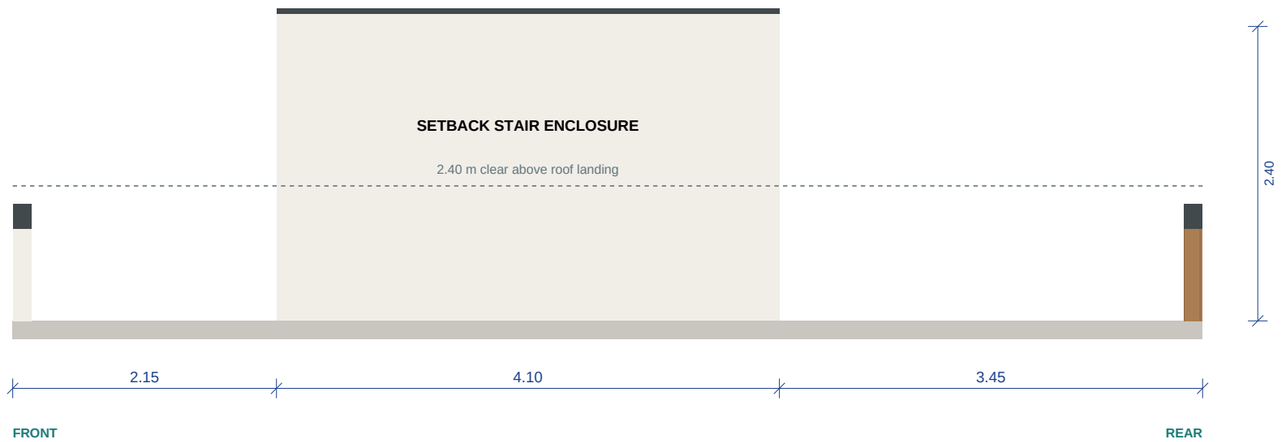

The foreground screens stay at +7.40 m. The new cap is +9.00 m; the dashed guard top is +7.55 m. The long enclosure wall uses warm-white plaster. Screen thickness is diagrammatic; this is a massing profile, not a stair section.

ROOF EXIT / NORTH SIDE

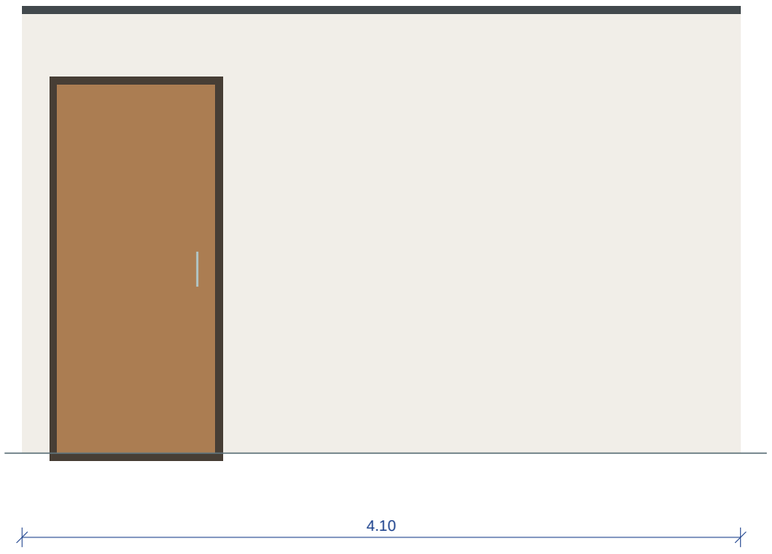

The door sits near the front end of the north wall and opens outward onto the roof. It is distinct from the master-bedroom balcony door one floor below. Confirm the finished threshold and landing drainage together.

FULL STAIR GEOMETRY RETAINED

Continue the south dog-leg stair for another 3.00 m rise: 17 equal risers of 176.47 mm, 250 mm treads, and 900 mm clear flights and landing. See sheet 08 in this set for the developed stair profile.

HEIGHT AND AREA ARE EXPLICIT

Cap +9.00 m; roof landing +6.45 m; underside +8.85 m. Added enclosure 9.02 m2; conservative combined enclosed/covered study area 126.84 m2 / 1,365.28 sq ft. Finishes do not enlarge the proposed enclosure.

Original style references / design context

REFERENCE IMAGES ONLY / NOT THE CURRENT OPENING ARRANGEMENT OR ROOF HEIGHT / NOT TO SCALE

ORIGINAL FRONT REFERENCE



Style source: white plaster, timber, rounded charcoal surrounds and recessed balconies. The current design adds the taller setback roof-stair enclosure and continuous roof guarding shown on sheets 05, 06, 09 and 11.

ORIGINAL REAR REFERENCE



The original rear photo shows superseded doors and an outdoor hearth. Current rear openings follow the plans: an independent ground service route, two upper toilet vents, master-bedroom side balcony entry, and a wash-only work area.

Current exterior / full roof access

PHOTOREALISTIC APPEARANCE STUDY / NOT TO SCALE / DIMENSIONED PLANS AND ELEVATIONS GOVERN



FRONT | REAR

R20 finishes - full-stair roof option - refer to dimensioned drawings

R20 front and rear: one honey-oak timber tone, oak front door, charcoal rear door, woven oak seating and an oak-tone louvre screen at the north end of the drying balcony. The stair enclosure rises 1.60 m above the existing screen; the master balcony entrance remains on the side.